

Rail & Trunk System - Electronic inserts
RTS 1500MM 50W 5-WIRE RIGHT ASYM WHITE
0042587



Product features

- RTS LED linear luminaire for industrial and commercial applications. 1500 mm lenght with asymmetrical (Right) optics provide homogenous light distribution for wide, shelf areas. Steel housing, White color, -25 ... +30 °C operating temperature range, 4000 K, CRI 80, 3 SDMC. 50 W power consumption, 8000 lm luminous flux, 160 lm/W efficacy, 1500 mm x 70.2 mm x 78.6 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 120,000 hours.



PRODUCT OVERVIEW

Product name	RTS 1500MM 50W 5-WIRE RIGHT ASYM WHITE
Technology	LED
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000986
Warranty	5 years
Fixture luminous flux (lm)	8000
Luminaire efficacy (lm/W)	160
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Total power consumption (W)	50
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Minimum dimming level (%)	100
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425870

DATA TABLE

General data	
Product name	RTS 1500MM 50W 5-WIRE RIGHT ASYM WHITE
Technology	LED
Housing	Steel
General application	Logistics & Industry
Operating temperature range (°C)	-25°C...+30°C
Performance ambient temperature Tq (°C)	25

Rail & Trunk System - Electronic inserts

RTS 1500MM 50W 5-WIRE RIGHT ASYM WHITE
0042587

ETIM Class	EC000986
Warranty	5 years

Optical data

Fixture luminous flux (lm)	8000
Luminaire efficacy (lm/W)	160
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Asymmetric
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	50
Mains voltage (V)	220-240V
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Transformer required	No
Dimmable	No
Dimming method	N/A
Minimum dimming level (%)	100
Drive current (mA)	620
Inrush Current (A)	20
Inrush Duration (µs)	250
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 16A C Breaker	27
Max. Luminaires per 16A B Breaker	19

Lifetime data

Lifespan L70 B50	120000
------------------	--------

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	70.2
Nominal Product Height (mm)	78.6
Weight (kg)	1.7

Packaging

Single packaging type	Without Packaging
-----------------------	-------------------


Rail & Trunk System - Electronic inserts
RTS 1500MM 50W 5-WIRE RIGHT ASYM WHITE
0042587

Product EAN number	5410288425870
Packaging single length / height (cm)	150.0
Packaging single width (cm)	7.5
Packaging single depth (cm)	6.5
DUN14 (outer)	05410288425870
Units per outer package	10
Packaging outer length / height (cm)	157.0
Packaging outer width (cm)	44.0
Packaging outer depth (cm)	21.0

Safety data

Optimal operating condition (°C)	-25-30
----------------------------------	--------

PHOTOMETRY

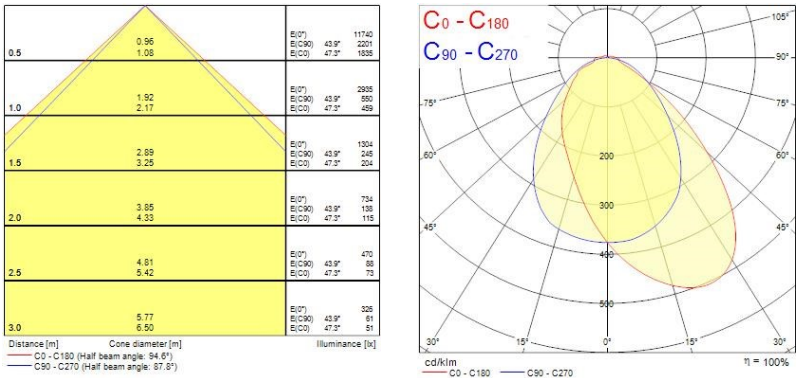

TECHNICAL DRAWINGS

