


Isoline
ISOLINE 1690MM 4K MD UGR 5C
0042522



Product features

- Isoline LED linear luminaire for industrial and commercial applications. 1690 mm lenght with medium optics provide homogenous light distribution for aisles and focus areas. Aluminium housing, RAL 9016. Max + 35 °C operating temperature range, 4000 K, CRI 80, UGR <20, 3 SDCM. 57 W power consumption, 8800 lm luminous flux, 154 lm/W efficacy, 1690 mm x 62 mm x 59 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 60,000 hours.

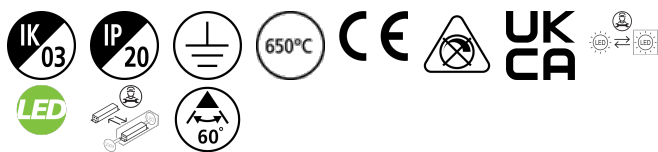

PRODUCT OVERVIEW

Product name	ISOLINE 1690MM 4K MD UGR 5C
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC000986
Warranty	5 years
Fixture luminous flux (lm)	8800
Luminous flux (lm)	8800
Luminaire efficacy (lm/W)	154
Colour temperature (K)	4000
Colour Code	840
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Glare control	< 20
Photobiological Risk Group	RG1
Total power consumption (W)	57
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425221

DATA TABLE

Isoline

ISOLINE 1690MM 4K MD UGR 5C

0042522

General data

Product name	ISOLINE 1690MM 4K MD UGR 5C
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	0°C...+35°C
ETIM Class	EC000986
Warranty	5 years

Optical data

Fixture luminous flux (lm)	8800
Luminous flux (lm)	8800
Luminaire efficacy (lm/W)	154
Colour temperature (K)	4000
Colour Code	840
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Glare control	< 20
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	57
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	250
Inrush Current (A)	25
Inrush Duration (µs)	250
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	27
Max. Luminaires per 13A C Breaker	35
Max. Luminaires per 16A C Breaker	45
Max. Luminaires per 20A C Breaker	58
Max. Luminaires per 10A B Breaker	16
Max. Luminaires per 13A B Breaker	21
Max. Luminaires per 16A B Breaker	27

Isoline

ISOLINE 1690MM 4K MD UGR 5C

0042522

Max. Luminaires per 20A B Breaker 35

Lifetime data

Lifespan L70 B50	60000
Lifespan L80 B10	60000
Lifespan L90 B10	31500


Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
IK rating of sensor	IK03
Diffuser finish	Transparent
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1690
Nominal Product Width (mm)	62
Nominal Product Height (mm)	59
Weight (kg)	3.5

Packaging

Single packaging type	Mix(80% carton, 20% plastic)
Product EAN number	5410288425221
Packaging single length / height (cm)	185.0
Packaging single width (cm)	7.2
Packaging single depth (cm)	6.9
DUN14 (outer)	05410288425221
Units per outer package	1
Packaging outer length / height (cm)	185.0
Packaging outer width (cm)	7.2
Packaging outer depth (cm)	6.9

PHOTOMETRY

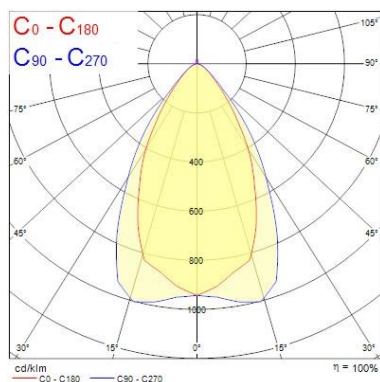

Distance [m]	Cone diameter [m]	E [lx]	E [lx]	E [lx]
0.5	0.64 0.54	33177	10609	11367
1.0	1.27 1.08	8294	2657	2842
1.5	1.91 1.62	3698	1181	1263
2.0	2.55 2.15	2074	664	710
2.5	3.19 2.69	1327	428	459
3.0	3.82 3.23	922	296	316

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 56.0°)
C90 - C270 (Half beam angle: 65.0°)

Isoline

ISOLINE 1690MM 4K MD UGR 5C

0042522

TECHNICAL DRAWINGS

