

ToLEDo Superia T8 CCG and AC

ToLEDo Superia T8 V7 4FT 2550LM 840
0029283



Product features

- A range of high performance ToLEDo Superia T8 LED tubes with reminiscent look of fluorescent tubes
- High performance glass construction design
- High lumen output, with an impressive lumen efficacy of 170 lm/W
- Omnidirectional light distribution and wide beam angle
- Average rated life of 50,000 hours
- Lamp length - 1200mm
- High power factor
- 200,000 switching cycle
- 5 years warranty for complete peace of mind
- Compatible with electromagnetic gear / CCG and also suitable for direct mains operation (220-240V)
- No bending or discoloration over time
- Suitable for general illumination in offices, supermarkets, department stores, train stations, petrol stations, parking lots, waterproof luminaires and maintenance free applications



PRODUCT OVERVIEW

Product name	ToLEDo Superia T8 V7 4FT 2550LM 840
Technology	LED
Watt (Rated) (W)	15
Lamp shape	Tube, double-ended
Type	LED exchangeable
Cap/Base	G13
Lamp finish	Opal
Fixture rating	Open
General application	Hospitality, Logistics & Industry, Residential & Consumer
ETIM Class	EC001959
E-number FI	4941302
Warranty	5 years
Luminous flux (lm)	2550
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	170
Photobiological Risk Group	RG0
Wattage (W)	15
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	50000
IP rating	IP20
Product EAN number	5410288292830

DATA TABLE

ToLEDo Superia T8 CCG and AC

ToLEDo Superia T8 V7 4FT 2550LM 840
0029283

General data

Product name	ToLEDo Superia T8 V7 4FT 2550LM 840
Technology	LED
Watt (Rated) (W)	15
Lamp shape	Tube, double-ended
Type	LED exchangeable
Cap/Base	G13
Lamp finish	Opal
Fixture rating	Open
General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C...+55°C
Performance ambient temperature T _a (°C)	25
ETIM Class	EC001959
E-number FI	4941302
Warranty	5 years

Optical data

Luminous flux (lm)	2550
Luminous flux (Rated) (lm)	2550
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	170
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	15
Product Voltage (V)	230
Lamp power factor	0.9
Control gear required	No
No. Of switching cycles before premature failures	>200000
Transformer required	No
Dimmable	No
Inrush Current (A)	5.1
Inrush Duration (µs)	764
Lamp Energy Label (class)	C
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	59
Max. Luminaires per 16A B Breaker	36

Lifetime data

Lifespan L70 B50	50000
Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

ToLEDo Superia T8 CCG and AC
ToLEDo Superia T8 V7 4FT 2550LM 840
0029283

Physical data

IP rating	IP20
Nominal Product Length (mm)	1212.4
Nominal Product Diameter (mm)	28
Weight (kg)	0.2


Packaging

Single packaging type	Carton
Product EAN number	5410288292830
Packaging single length / height (cm)	125.2
Packaging single width (cm)	2.9
Packaging single depth (cm)	2.9
DUN14 (outer)	15410288292837
Units per outer package	10
Packaging outer length / height (cm)	130.0
Packaging outer width (cm)	22.0
Packaging outer depth (cm)	10.5


Safety data

Optimal operating condition (°C)	-20-55
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Suitable for household illumination	Yes
Safety message	Suitable for totally enclosed fixture

PHOTOMETRY

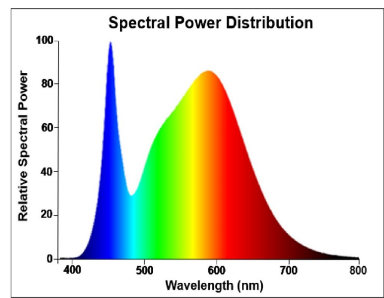

TECHNICAL DRAWINGS




ToLEDo Superia T8 CCG and AC
ToLEDo Superia T8 V7 4FT 2550LM 840
0029283



ENERGY
SYLVANIA

0029283

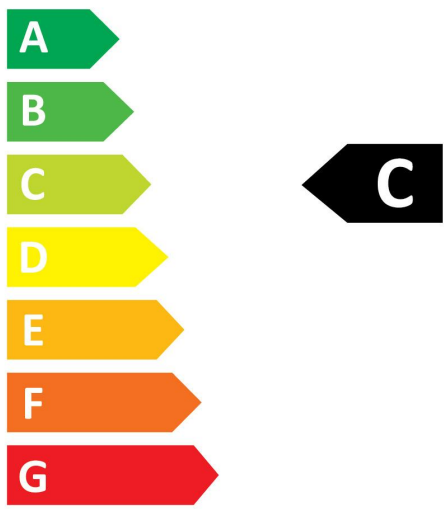


15
kWh/1000h



2019/2015

ToLEDo Superia T8 CCG and AC
ToLEDo Superia T8 V7 4FT 2550LM 840
0029283

**ENERG**
SYLVANIA
0029283

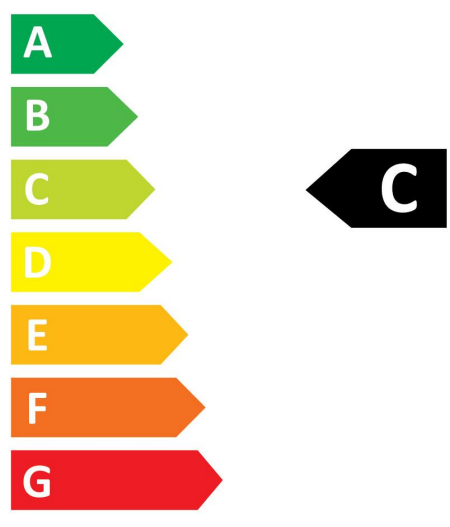

15
kWh/1000h

