

SylSafe Bay
SylSafe Bay RT C EM3 NM MS
0041741



Product features

- SylSafe Bay RT C EM3 NM MS is a dust and waterproof surface mounted emergency luminaire for industrial applications. Escape route optics for standard mounting heights <4m. Non-maintained 3hr emergency duration with NiMH rechargeable battery. Recharge period 24 hours. 200lm, 3W, IK03, IP65. Power Factor 0.44. Class II electrical construction.



PRODUCT OVERVIEW

Product name	SylSafe Bay RT C EM3 NM MS
Technology	LED
Type	LED
Mount	Ceiling surface mounting
General application	Office, Hospitality, Retail, Museums & Galleries, Education, Logistics & Industry
ETIM Class	EC001957
Warranty	5 years
Fixture luminous flux (lm)	200
Luminaire efficacy (lm/W)	67
Colour temperature (K)	5700
CRI (Ra)	75
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	200
Light source included	INTEGRATED LED
Electrical protection	Class II
Housing colour	White
IP rating	IP65
IK rating	IK03
Product EAN number	5410288417417

DATA TABLE

General data	
Product name	SylSafe Bay RT C EM3 NM MS
Technology	LED
Type	LED
Mount	Ceiling surface mounting
General application	Office, Hospitality, Retail, Museums & Galleries, Education, Logistics & Industry
ETIM Class	EC001957
Warranty	5 years
Optical data	
Fixture luminous flux (lm)	200

SylSafe Bay

SylSafe Bay RT C EM3 NM MS

0041741

Luminaire efficacy (lm/W)	67
Colour temperature (K)	5700
CRI (Ra)	75
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	200
Emergency duration (h)	3

Electrical data

Light source included	INTEGRATED LED
Mains voltage (V)	230-240V
Lamp power factor	0.44
Electrical protection	Class II
Control gear required	Yes
Drive current (mA)	30
Nominal Frequency (Hz)	50/60Hz

Physical data


Housing colour	White
IP rating	IP65
IK rating	IK03
Nominal Product Length (mm)	197
Nominal Product Width (mm)	197
Nominal Product Height (mm)	53
Weight (kg)	0.588

Packaging

Single packaging type	Carton
Product EAN number	5410288417417
Packaging single length / height (cm)	23.0
Packaging single width (cm)	15.0
Packaging single depth (cm)	7.0
DUN14 (outer)	05410288417417
Units per outer package	5
Packaging outer length / height (cm)	42.2
Packaging outer width (cm)	25.2
Packaging outer depth (cm)	13.2

PHOTOMETRY

SylSafe Bay
SylSafe Bay RT C EM3 NM MS
0041741

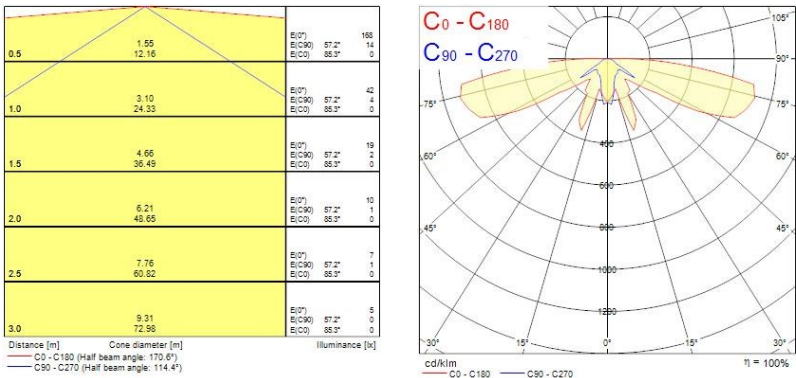

TECHNICAL DRAWINGS

