

RANA Linear Recessed - Louvre+Prismatic Optic

RANA LINEAR R 32 4K LOUV+PRI SSC01 W

0052479



Product features

- Ceiling recessed LED Linear luminaire with Louvre+MicroPrismatic Optic, Dimensions: 1154mm x 90mm x 91mm, Direct, White Body, SylSmart Standalone capable, Electric Class 1, Neutral White LED (4000K), 3250lm, 28W, 116lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<19, L90B10 at 50,000 hours, Glow Wire Test 850°C, Can be covered with building insulation of Glass Wool type.



PRODUCT OVERVIEW

Product name	RANA LINEAR R 32 4K LOUV+PRI SSC01 W
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Internal
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	3250
Luminous flux (lm)	3250
Luminaire efficacy (lm/W)	116
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 18
Photobiological Risk Group	RG0
Total power consumption (W)	28
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288524795

RANA Linear Recessed - Louvre+Prismatic Optic

RANA LINEAR R 32 4K LOUV+PRI SSC01 W
0052479

DATA TABLE

General data

Product name	RANA LINEAR R 32 4K LOUV+PRI SSC01 W
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Internal
General application	Education, Office
Operating temperature range (°C)	-25°C...+40°C
Performance ambient temperature T _q (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3250
Luminous flux (lm)	3250
Luminaire efficacy (lm/W)	116
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Distribution type	Symmetric
Glare control	< 18
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	28
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic ballast
Transformer required	Yes
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
Drive current (mA)	550
Inrush Current (A)	20
Inrush Duration (µs)	25
Glow Wire Test (°C)	850

RANA Linear Recessed - Louvre+Prismatic Optic

RANA LINEAR R 32 4K LOUV+PRI SSC01 W
0052479

Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	57
Max. Luminaires per 13A C Breaker	71
Max. Luminaires per 16A C Breaker	93
Max. Luminaires per 20A C Breaker	114
Max. Luminaires per 10A B Breaker	35
Max. Luminaires per 13A B Breaker	45
Max. Luminaires per 16A B Breaker	55
Max. Luminaires per 20A B Breaker	68

Lifetime data

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B10	72000
Lifespan L90 B50	72000
Lifespan L90 B20	50000
Lifespan L90 B10	46000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Reflector finish	Matt
Nominal Product Length (mm)	1150
Nominal Product Width (mm)	90
Nominal Product Height (mm)	91
Cutout Dimensions (W x L in mm or Diameter in mm)	72
Weight (kg)	3.15
Recessed Depth (mm)	90

Packaging


Single packaging type	Carton
Product EAN number	5410288524795
Packaging single length / height (cm)	117.0
Packaging single width (cm)	10.5
Packaging single depth (cm)	11.5
DUN14 (outer)	05410288524795
Units per outer package	1
Packaging outer length / height (cm)	117.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	11.5

RANA Linear Recessed - Louvre+Prismatic Optic
RANA LINEAR R 32 4K LOUV+PRI SSC01 W
0052479

Safety data

Optimal operating condition (°C)	-25-40
----------------------------------	--------

PHOTOMETRY

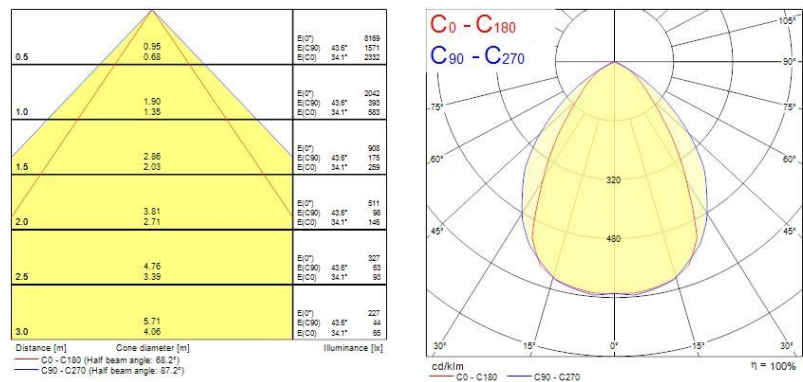

TECHNICAL DRAWINGS

