

Colossal 900 Prismatic

COLOSSAL 900mm 940 PRISM DIR WHITE SSC
2071256



Product features

- 900mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with PMMA prismatic diffuser. Direct light distribution, 6955lm luminous flux, 58.7W system power, 118lm/W luminaire efficacy. Sylsmart Standalone enabled. Colour rendering index Ra >90, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40/IP20, IK03. 350mA drive current. UGR 19. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.



PRODUCT OVERVIEW

Product name	COLOSSAL 900mm 940 PRISM DIR WHITE SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	6955
Luminaire efficacy (lm/W)	118
Colour temperature (K)	4000
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 18
Photobiological Risk Group	RG0
Total power consumption (W)	58.7
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768712564

DATA TABLE

General data

Product name	COLOSSAL 900mm 940 PRISM DIR WHITE SSC
--------------	--

Colossal 900 Prismatic

COLOSSAL 900mm 940 PRISM DIR WHITE SSC

2071256

Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality, Office
Operating temperature range (°C)	5°C...+25°C
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	6955
Luminaire efficacy (lm/W)	118
Colour temperature (K)	4000
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 18
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	58.7
Current (A)	350
Mains voltage (V)	220-240V
Lamp power factor	0.99
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	Yes
Dimming method	SylSmart SSC
Drive current (mA)	350
Inrush Current (A)	23
Inrush Duration (µs)	174
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	18
Max. Luminaires per 13A C Breaker	26
Max. Luminaires per 16A C Breaker	28
Max. Luminaires per 20A C Breaker	34
Max. Luminaires per 10A B Breaker	9
Max. Luminaires per 13A B Breaker	13
Max. Luminaires per 16A B Breaker	14
Max. Luminaires per 20A B Breaker	17

Colossal 900 Prismatic

COLOSSAL 900mm 940 PRISM DIR WHITE SSC
2071256

Lifetime data

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PMMA Acrylic
Nominal Product Height (mm)	93
Nominal Product Diameter (mm)	888
Weight (kg)	16.6


Packaging

Single packaging type	Carton
Product EAN number	5025768712564
Packaging single length / height (cm)	14.0
Packaging single width (cm)	96.0
Packaging single depth (cm)	96.0
DUN14 (outer)	05025768712564
Units per outer package	1
Packaging outer length / height (cm)	14.0
Packaging outer width (cm)	96.0
Packaging outer depth (cm)	96.0

Safety data

Optimal operating condition (°C)	5-25
----------------------------------	------

PHOTOMETRY

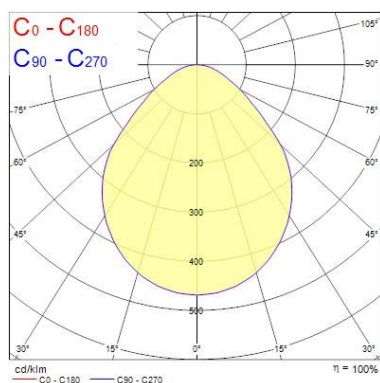

Distance [m]	Cone diameter [m]	E (°)	E (C0)	46.2°	13042
0.5	1.04	E (°)	E (C0)	46.2°	2167
1.0	2.09	E (°)	E (C0)	46.2°	3261
1.5	3.13	E (°)	E (C0)	46.2°	542
2.0	4.17	E (°)	E (C0)	46.2°	1449
2.5	5.21	E (°)	E (C0)	46.2°	241
3.0	6.26	E (°)	E (C0)	46.2°	315
		E (°)	E (C0)	46.2°	136
		E (°)	E (C0)	46.2°	522
		E (°)	E (C0)	46.2°	87
		E (°)	E (C0)	46.2°	362
		E (°)	E (C0)	46.2°	50

Colossal 900 Prismatic

COLOSSAL 900mm 940 PRISM DIR WHITE SSC

2071256

TECHNICAL DRAWINGS

