

START eco Downlight 215mm Round & Square Surface
START eco Downlight 215 Square 1400lm 840 Surface
0054115



Product features

- START eco Downlight is an integrated LED surface mounted downlight with built-in non dimmable driver; 15W; 1400Lm; 93Lm/W; 4000K.




PRODUCT OVERVIEW

Product name	START eco Downlight 215 Square 1400lm 840 Surface
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Retail
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	1400
Luminaire efficacy (lm/W)	93
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288541150

PHOTOMETRY

START eco Downlight 215mm Round & Square Surface
START eco Downlight 215 Square 1400lm 840 Surface
0054115

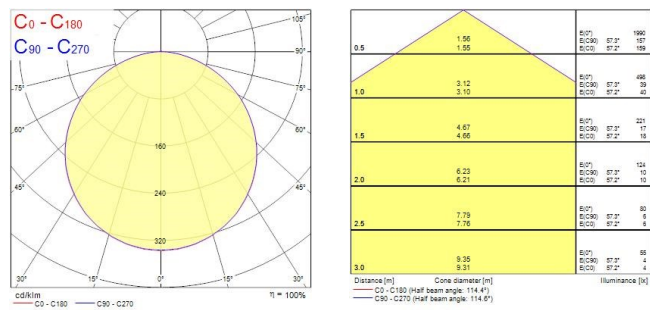

TECHNICAL DRAWINGS

