

Colossal 600 OPAL


COLOSSAL 600mm 940 OPAL DIR+HAL WHITE

2071221



Product features

- 600mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct/indirect (halo) light distribution, 4635lm luminous flux, 40.6W system power, 114lm/W luminaire efficacy. Constant current driver. Colour rendering index Ra >90, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 450mA drive current. Electrical protection Class I, 220-240V. Reported lifetime 66k hours L90B10.

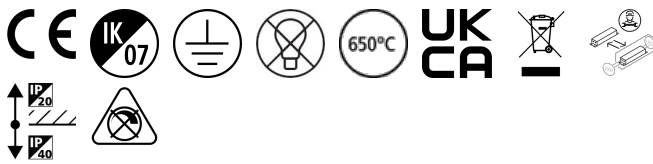

PRODUCT OVERVIEW

Product name	COLOSSAL 600mm 940 OPAL DIR+HAL WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4635
Luminous flux (lm)	4635
Luminaire efficacy (lm/W)	114
Colour temperature (K)	4000
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	40.6
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768712212

DATA TABLE

Colossal 600 OPAL

COLOSSAL 600mm 940 OPAL DIR+HAL WHITE
2071221

General data

Product name	COLOSSAL 600mm 940 OPAL DIR+HAL WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
Operating temperature range (°C)	10°C...+25°C
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4635
Luminous flux (lm)	4635
Luminaire efficacy (lm/W)	114
Colour temperature (K)	4000
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	40.6
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	450
Inrush Current (A)	15
Inrush Duration (µs)	250
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	40
Max. Luminaires per 13A C Breaker	51
Max. Luminaires per 16A C Breaker	63
Max. Luminaires per 20A C Breaker	80
Max. Luminaires per 10A B Breaker	24
Max. Luminaires per 13A B Breaker	31

Colossal 600 OPAL

COLOSSAL 600mm 940 OPAL DIR+HAL WHITE

2071221

Max. Luminaires per 16A B Breaker	38
Max. Luminaires per 20A B Breaker	48

Lifetime data

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	93
Nominal Product Diameter (mm)	604
Weight (kg)	9.0

Packaging

Single packaging type	Carton
Product EAN number	5025768712212
Packaging single length / height (cm)	14.0
Packaging single width (cm)	68.0
Packaging single depth (cm)	68.0
DUN14 (outer)	05025768712212
Units per outer package	1
Packaging outer length / height (cm)	14.0
Packaging outer width (cm)	68.0
Packaging outer depth (cm)	68.0

Safety data


Optimal operating condition (°C)	10-25
----------------------------------	-------

PHOTOMETRY

Distance [m]	Cone diameter [m]	E ₀ ^(0°) E ₁₀ ^(10°) E ₃₀ ^(30°) E ₄₅ ^(45°) E ₆₀ ^(60°) E ₇₅ ^(75°) E ₉₀ ^(90°)	Illuminance [lx]
0.5	1.41	84.7°	6675 645
1.0	2.82	84.7°	1669 161
1.5	4.24	84.7°	742 72
2.0	5.65	84.7°	417 42
2.5	7.06	84.7°	267 26
3.0	8.47	84.7°	185 18

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 109.4°)

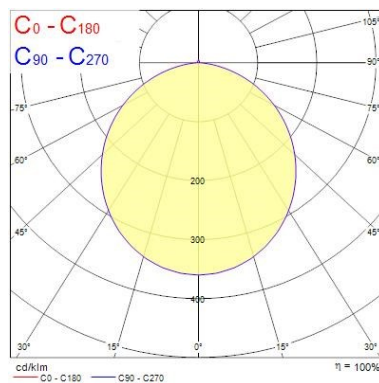

Colossal 600 OPAL

COLOSSAL 600mm 940 OPAL DIR+HAL WHITE

2071221

TECHNICAL DRAWINGS

