

Colossal 400 Prismatic

COLOSSAL 400mm 830 PRISM DIR WHITE SSC
2071110



Product features

- 400mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with PMMA prismatic diffuser. Direct light distribution, 1845lm luminous flux, 15.9W system power, 116lm/W luminaire efficacy. Sylsmart Standalone enabled. Colour rendering index Ra >80, 3000K Warm White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 350mA drive current. UGR 19. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.



PRODUCT OVERVIEW

Product name	COLOSSAL 400mm 830 PRISM DIR WHITE SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
General application	Office, Hospitality
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	1845
Luminaire efficacy (lm/W)	116
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	15.9
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768711109

DATA TABLE

General data

Product name	COLOSSAL 400mm 830 PRISM DIR WHITE SSC
--------------	--

Colossal 400 Prismatic

COLOSSAL 400mm 830 PRISM DIR WHITE SSC

2071110

Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
General application	Office, Hospitality
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1845
Luminaire efficacy (lm/W)	116
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	15.9
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	Yes
Dimming method	SylSmart SSC
Drive current (mA)	350
Inrush Current (A)	20
Inrush Duration (µs)	25
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	57
Max. Luminaires per 13A C Breaker	71
Max. Luminaires per 16A C Breaker	93
Max. Luminaires per 20A C Breaker	114
Max. Luminaires per 10A B Breaker	35
Max. Luminaires per 13A B Breaker	45
Max. Luminaires per 16A B Breaker	55

Colossal 400 Prismatic

COLOSSAL 400mm 830 PRISM DIR WHITE SSC

2071110

Max. Luminaires per 20A B Breaker	68
-----------------------------------	----

Lifetime data

Lifespan L70 B50	170000
Lifespan L70 B20	170000
Lifespan L70 B10	170000
Lifespan L80 B50	166500
Lifespan L80 B20	145000
Lifespan L80 B10	134000
Lifespan L90 B50	80000
Lifespan L90 B20	70000
Lifespan L90 B10	66000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PMMA Acrylic
Nominal Product Height (mm)	93
Nominal Product Diameter (mm)	400
Weight (kg)	6.5

Packaging

Single packaging type	Carton
Product EAN number	5025768711109
Packaging single length / height (cm)	14.0
Packaging single width (cm)	47.0
Packaging single depth (cm)	47.0
DUN14 (outer)	05025768711109
Units per outer package	1
Packaging outer length / height (cm)	14.0
Packaging outer width (cm)	47.0
Packaging outer depth (cm)	47.0

Safety data

Optimal operating condition (°C)	10-25
----------------------------------	-------


PHOTOMETRY

Colossal 400 Prismatic
COLOSSAL 400mm 830 PRISM DIR WHITE SSC
2071110

0.5	1.04	E(0°) E(C0)	45.2°	3480 575
1.0	2.09	E(0°) E(C0)	45.2°	865 144
1.5	3.13	E(0°) E(C0)	45.2°	354 64
2.0	4.17	E(0°) E(C0)	45.2°	215 38
2.5	5.21	E(0°) E(C0)	45.2°	133 23
3.0	6.26	E(0°) E(C0)	45.2°	96 15

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 92.4°)

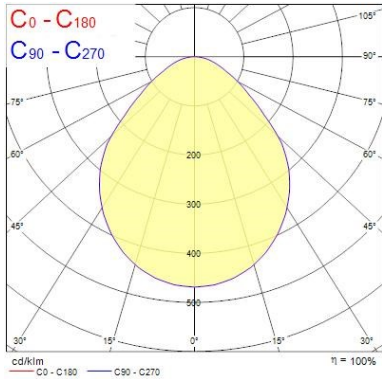

TECHNICAL DRAWINGS

