

Stello Comfort LED Fixed


STELLO COMFORT LED FIX WW + DB

3079361



Product features

- Fixed accent LED downlight, with deepened LED position for low glare and comfortable light. Wide range of tool less replaceable reflectors, complete with leading / trailing edge driver and Loop in Loop out connector, black aluminium heatsink and white front bezel, with sandblasted aluminium reflector, 884LM, 13W, 68lm/W, 3000K Driver current: 250mA, CRI80, 40° beam angle, leading / trailing edge dimmable, IP44, IK02, 35,000 hrs (L70), (WxD) 90x100mm,

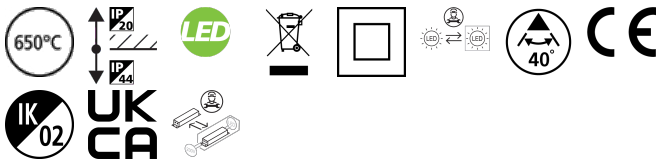

PRODUCT OVERVIEW

| | |
|-----------------------------|-------------------------------------|
| Product name | STELLO COMFORT LED FIX WW + DB |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| Environment | Indoor |
| General application | Hospitality, Residential & Consumer |
| ETIM Class | EC001744 |
| E-number FI | 4271085 |
| E-number SE | 7475355 |
| Warranty | 3 years |
| Fixture luminous flux (lm) | 884 |
| Luminaire efficacy (lm/W) | 68 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Beam Angle (°) | 40 |
| Total power consumption (W) | 13 |
| Electrical protection | Class II |
| Control gear type | Electronic ballast |
| Dimming method | Mains: leading / trailing edge |
| Housing colour | White |
| IP rating | IP44/20 |
| IK rating | IK02 |
| Product EAN number | 8711971793618 |

DATA TABLE

General data

| | |
|--------------|--------------------------------|
| Product name | STELLO COMFORT LED FIX WW + DB |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |

Stello Comfort LED Fixed

STELLO COMFORT LED FIX WW + DB
3079361

| | |
|---------------------|-------------------------------------|
| Environment | Indoor |
| General application | Hospitality, Residential & Consumer |
| ETIM Class | EC001744 |
| E-number FI | 4271085 |
| E-number SE | 7475355 |
| Warranty | 3 years |

Optical data

| | |
|----------------------------|------------|
| Fixture luminous flux (lm) | 884 |
| Luminaire efficacy (lm/W) | 68 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Adjustable chromaticity | N |
| Beam Angle (°) | 40 |

Electrical data

| | |
|-----------------------------|--------------------------------|
| Total power consumption (W) | 13 |
| Mains voltage (V) | 220-240V |
| Electrical protection | Class II |
| Control gear type | Electronic ballast |
| Transformer required | Yes |
| Dimming method | Mains: leading / trailing edge |
| Drive current (mA) | 250 |
| Glow Wire Test (°C) | 650 |

Lifetime data

| | |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
|------------------|--------|

Physical data

| | |
|---|-------------|
| Housing colour | White |
| IP rating | IP44/20 |
| IK rating | IK02 |
| Diffuser finish | Transparent |
| Diffuser material | Glass |
| Reflector finish | Matt |
| Nominal Product Length (mm) | 90 |
| Nominal Product Width (mm) | 90 |
| Nominal Product Height (mm) | 110 |
| Nominal Product Diameter (mm) | 90 |
| Cutout Dimensions (W x L in mm or Diameter in mm) | 80 |
| Weight (kg) | 0.509 |
| Recessed Depth (mm) | 110 |

Packaging


| | |
|-----------------------|---------------|
| Single packaging type | Carton |
| Product EAN number | 8711971793618 |

Stello Comfort LED Fixed

STELLO COMFORT LED FIX WW + DB
3079361

| | |
|---------------------------------------|----------------|
| Packaging single length / height (cm) | 12.8 |
| Packaging single width (cm) | 15.7 |
| Packaging single depth (cm) | 10.0 |
| DUN14 (outer) | 18711971793615 |
| Units per outer package | 12 |
| Packaging outer length / height (cm) | 49.1 |
| Packaging outer width (cm) | 28.1 |
| Packaging outer depth (cm) | 22.6 |

PHOTOMETRY

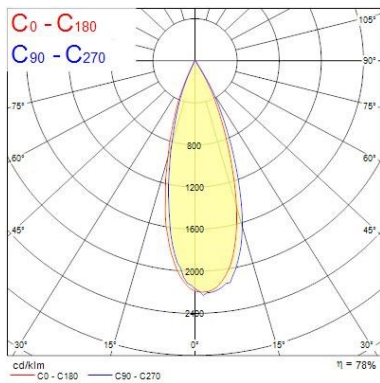

TECHNICAL DRAWINGS

