

## Resisto fixed output


Resisto 1500 IP66 7600lm 830

0010241



### Product features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 7600lm; 55W; 138lm/W; 3000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark.

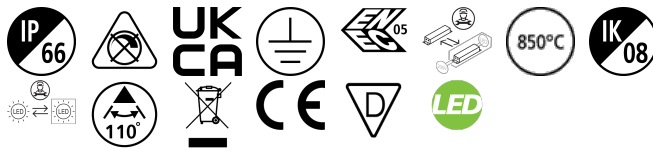


## PRODUCT OVERVIEW

|                                 |                                                           |
|---------------------------------|-----------------------------------------------------------|
| Product name                    | Resisto 1500 IP66 7600lm 830                              |
| Technology                      | LED                                                       |
| Cap/Base                        | N/A                                                       |
| Housing                         | PC Polycarbonate                                          |
| Mount                           | Ceiling surface mounting, Suspended, Wall surface mounted |
| General application             | Logistics & Industry                                      |
| ETIM Class                      | EC002892                                                  |
| E-number FI                     | 4357054                                                   |
| Warranty                        | 5 years                                                   |
| Fixture luminous flux (lm)      | 7600                                                      |
| Luminaire efficacy (lm/W)       | 138                                                       |
| Colour temperature (K)          | 3000                                                      |
| CRI (Ra)                        | 80                                                        |
| Colour Variation Initial (SDCM) | SDCM5                                                     |
| Colour Consistency (SDCM)       | 5                                                         |
| Beam Angle (°)                  | 110                                                       |
| Glare control                   | < 25                                                      |
| Photobiological Risk Group      | RG1                                                       |
| Total power consumption (W)     | 55                                                        |
| Electrical protection           | Class I                                                   |
| Control gear type               | LED driver constant current                               |
| Dimmable                        | No                                                        |
| Dimming method                  | N/A                                                       |
| LED Flickering Rate             | Ultra low (5% or less)                                    |
| Housing colour                  | Grey                                                      |
| IP rating                       | IP66                                                      |
| IK rating                       | IK08                                                      |
| Product EAN number              | 5410288102412                                             |

## PHOTOMETRY

Resisto fixed output  
Resisto 1500 IP66 7600lm 830  
0010241

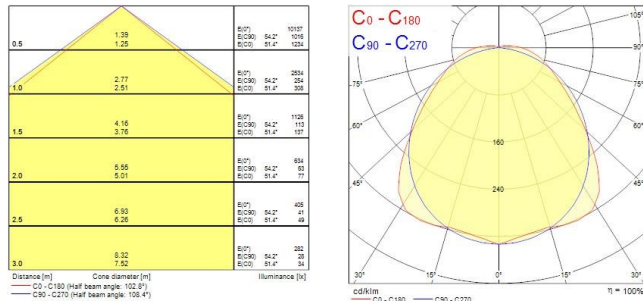

## TECHNICAL DRAWINGS

