

## START DOWNLIGHT IP44 225


START Downlight 225 IP44 DALI 2325Lm 830

0030338



### Product features

- Ceiling recessed LED downlight IP44 (from the front), with only 65mm product depth and 225mm cutout. Supplied with DALI Tridonic push dim driver with loop in - out option (2800671). Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 2325LM, 23W, 101lm/W, 3000K, Driver Current: 650mA, CRI80, 74° beam angle, IP44 from the front, IK07, (HxW) 65x225mm, Class 2, 220-240V. Meets TP(a) requirements.

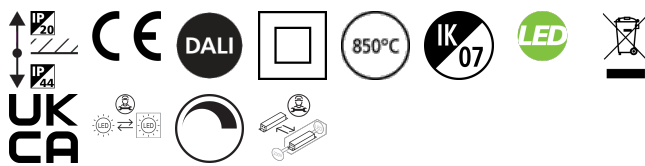


### PRODUCT OVERVIEW

|                                 |                                           |
|---------------------------------|-------------------------------------------|
| Product name                    | START Downlight 225 IP44 DALI 2325Lm 830  |
| Technology                      | LED                                       |
| Cap/Base                        | N/A                                       |
| Housing                         | Aluminium                                 |
| Mount                           | Ceiling recessed mounting                 |
| General application             | Hospitality, Logistics & Industry, Office |
| ETIM Class                      | EC001744                                  |
| E-number FI                     | 4278167                                   |
| Warranty                        | 5 years                                   |
| Fixture luminous flux (lm)      | 2325                                      |
| Luminous flux (lm)              | 2325                                      |
| Luminaire efficacy (lm/W)       | 101                                       |
| LOR (%)                         | 100                                       |
| Colour temperature (K)          | 3000                                      |
| Light colour                    | Warm White                                |
| CRI (Ra)                        | 80                                        |
| Colour Variation Initial (SDCM) | SDCM5                                     |
| Beam Angle (°)                  | 74                                        |
| Glare control                   | < 25                                      |
| Photobiological Risk Group      | RG0                                       |
| Total power consumption (W)     | 23                                        |
| Electrical protection           | Class II                                  |
| Control gear type               | LED driver constant current               |
| Dimmable                        | Yes                                       |
| Dimming method                  | DALI                                      |
| Minimum dimming level (%)       | 1                                         |
| LED Flickering Rate             | Ultra low (5% or less)                    |
| Housing colour                  | RAL 9003 - Signal white                   |
| IP rating                       | IP44/20                                   |
| IK rating                       | IK07                                      |
| Product EAN number              | 5410288303383                             |

START DOWNLIGHT IP44 225  
START Downlight 225 IP44 DALI 2325Lm 830  
0030338

PHOTOMETRY

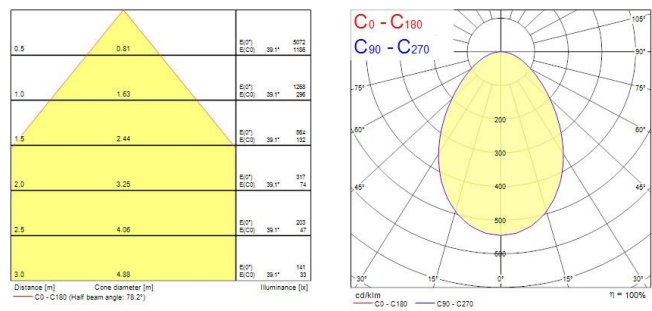

TECHNICAL DRAWINGS

