

Start Spot Aluminium IP44


START SPOT ALUMINIUM 760LM 840 IP44 BLK

0005182



Product features

- Integrated LED recessed spotlight, vertical tilt 30°, black bezel finish with black reflector, white replaceable reflector included in the packaging, 760lm (black reflector), 9W, dimmable trailing/leading edge, 4000K, 40° degree beam angle, polycarbonate and aluminium body, low profile 62mm recessed depth, IP44 from the front, IK03, loop-in/loop-out terminals for fast wiring, weight 0,165Kg, 85mm bezel diameter, 68-72mm cutout, clear lens.

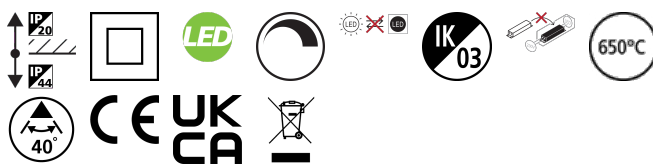


PRODUCT OVERVIEW

Product name	START SPOT ALUMINIUM 760LM 840 IP44 BLK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Residential & Consumer, Retail
ETIM Class	EC001744
E-number FI	4278422
Warranty	3 years
Fixture luminous flux (lm)	760
Luminaire efficacy (lm/W)	84
Colour temperature (K)	4000
Light colour	Candlelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	40
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	9
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Minimum dimming level (%)	10
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9005 - Jet black
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288051826

PHOTOMETRY

Start Spot Aluminium IP44
START SPOT ALUMINIUM 760LM 840 IP44 BLK
0005182

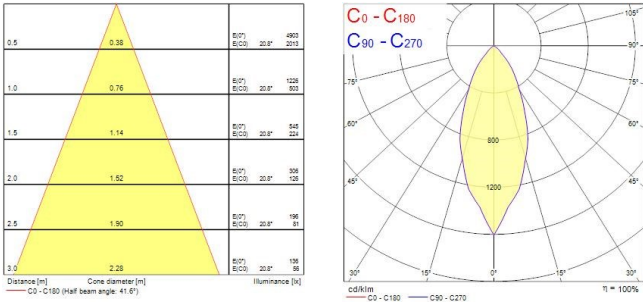

TECHNICAL DRAWINGS

