

INSAVER SLIM 205/225 MULTIPOWER

Insaver Slim U19 IP44 225 Multipower 780-2530lm 840
0030389



Product features

- Ceiling recessed LED downlight. With the help of DIP Switch multiple lumen outputs can be set up in 6 steps (5.8W 780lm, 7.5W 1050lm, 9W 1250lm, 11.5W 1600lm, 13W 1750lm, 15.5W 2050m, 17W 2230lm, 19.5W 2530lm). Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver ; 4000K; UGR <19 with shallow product depth 60mm. Meets TP(a) requirements.













PRODUCT OVERVIEW

Product name	Insaver Slim U19 IP44 225 Multipower 780-2530lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278489
Warranty	5 years
Fixture luminous flux (lm)	2530
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	19.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303895


PHOTOMETRY

INSAVER SLIM 205/225 MULTIPOWER

Insaver Slim U19 IP44 225 Multipower 780-2530lm 840
0030389



INSAVER SLIM 205/225 MULTIPOWER
Insaver Slim U19 IP44 225 Multipower 780-2530lm 840
0030389

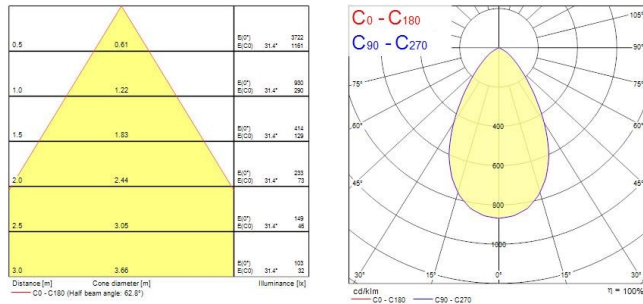

TECHNICAL DRAWINGS

