

Resisto fixed output


Resisto 1500 IP66 7600lm 840

0010244



Product features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 7600lm; 55W; 138lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark.

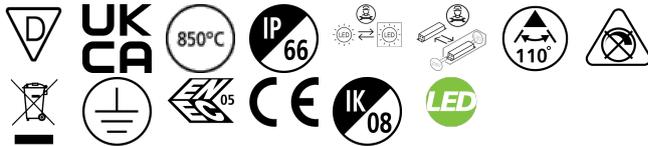

PRODUCT OVERVIEW

| | |
|---------------------------------|------------------------------|
| Product name | Resisto 1500 IP66 7600lm 840 |
| Technology | LED |
| Housing | PC Polycarbonate |
| General application | Logistics & Industry |
| ETIM Class | EC002892 |
| E-number FI | 4357057 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 7600 |
| Luminaire efficacy (lm/W) | 138 |
| Colour temperature (K) | 4000 |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM5 |
| Colour Consistency (SDCM) | 5 |
| Beam Angle (°) | 110 |
| Glare control | < 25 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 55 |
| Electrical protection | Class I |
| Dimmable | No |
| Dimming method | N/A |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | Grey |
| IP rating | IP66 |
| IK rating | IK08 |
| Product EAN number | 5410288102443 |

PHOTOMETRY

