


START Waterproof Slim  
START Waterproof Slim 1200 IP65 4600lm 840  
0046370



Product features

- START Waterproof Slim is a LED integrated polycarbonate housing luminaire with easy to access electrical terminal through bayonet lock end caps and tool-free electrical connection due to push-in terminal. Flexible installation as mounting brackets can be positioned freely on the luminaire. 35W; 4600lm; High efficiency with 131lm/W and 100,000 hours lifespan L70B50. SDCM < 5; IP65; IK08; Class I; 1207mm x 70mm x 69mm.

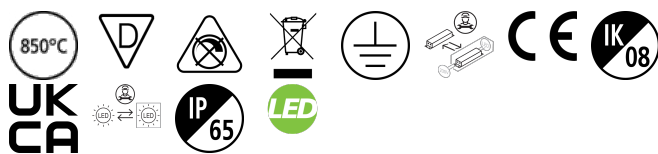


PRODUCT OVERVIEW

|                                 |                                            |
|---------------------------------|--------------------------------------------|
| Product name                    | START Waterproof Slim 1200 IP65 4600lm 840 |
| Technology                      | LED                                        |
| Cap/Base                        | N/A                                        |
| Housing                         | PC Polycarbonate                           |
| Mount                           | Ceiling surface mounting                   |
| General application             | Logistics & Industry                       |
| ETIM Class                      | EC002892                                   |
| E-number FI                     | 4357076                                    |
| Warranty                        | 5 years                                    |
| Fixture luminous flux (lm)      | 4600                                       |
| Luminaire efficacy (lm/W)       | 131                                        |
| Colour temperature (K)          | 4000                                       |
| Light colour                    | Neutral White                              |
| CRI (Ra)                        | 80                                         |
| Colour Variation Initial (SDCM) | SDCM5                                      |
| Beam Angle (°)                  | 120                                        |
| Photobiological Risk Group      | RG0                                        |
| Total power consumption (W)     | 35                                         |
| Electrical protection           | Class I                                    |
| Control gear type               | LED driver constant current                |
| Dimmable                        | No                                         |
| Dimming method                  | N/A                                        |
| Housing colour                  | Grey                                       |
| IP rating                       | IP65                                       |
| IK rating                       | IK08                                       |
| Product EAN number              | 5410288463704                              |

PHOTOMETRY

START Waterproof Slim  
START Waterproof Slim 1200 IP65 4600lm 840  
0046370

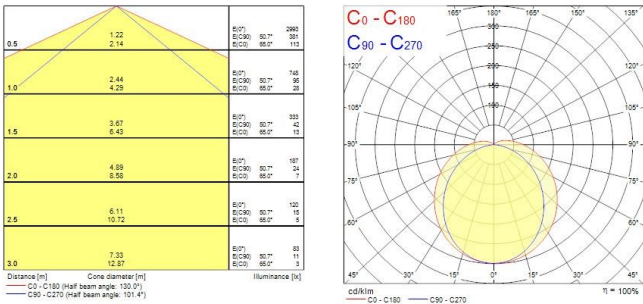

TECHNICAL DRAWINGS

