

Start Downlight 5in1 65-185 PIR
START Downlight 5in1 65-185 1800LM PIR
0053152



Product features

- START Downlight 5in1 is an integrated LED recessed / surface mounted downlight with built in non dimmable driver and PIR sensor. PIR sensor with time settings (3 min max) and adjustable daylight lux level. 2 options for lumen output 900lm or 1800lm. Colour temperature (3000K, 4000K and 6500K) can be chosen by a 3-way switch located on the back of the fixture. Adaptability to various cut-outs from 65mm to 185mm




PRODUCT OVERVIEW

Product name	START Downlight 5in1 65-185 1800LM PIR
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Ceiling surface mounting
General application	Retail
ETIM Class	EC001744
E-number FI	4278433
Warranty	3 years
Fixture luminous flux (lm)	1800
Luminaire efficacy (lm/W)	100
Colour temperature (K)	4000
Light colour	N/A
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK05
Product EAN number	5410288531526

PHOTOMETRY

Start Downlight 5in1 65-185 PIR
START Downlight 5in1 65-185 1800LM PIR
0053152

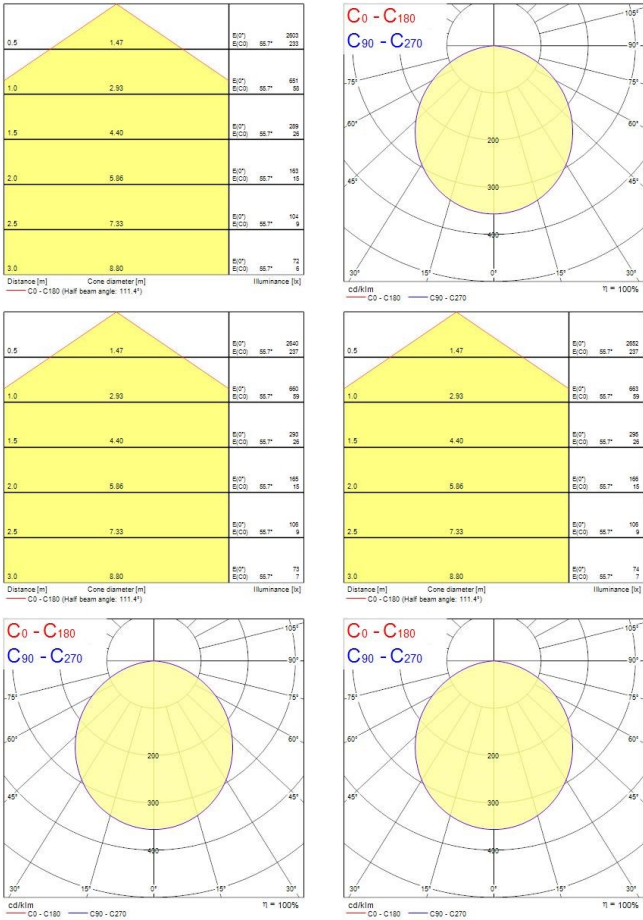

TECHNICAL DRAWINGS

