

START Downlight Flat IP44 Dimmable 155mm Round Recessed

Start Downlight Flat 157 IP44 1000LM 830 DIM
0054120



Product features

- START Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate, phase dimmable driver and loop in- out box, 12W; 1000Lm; 83Lm/W; 3000K; IP44 rated from the front.




PRODUCT OVERVIEW

Product name	Start Downlight Flat 157 IP44 1000LM 830 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
E-number FI	4278493
Warranty	5 years
Fixture luminous flux (lm)	1000
Luminaire efficacy (lm/W)	83
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Max load (A)	120
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541204

PHOTOMETRY

START Downlight Flat IP44 Dimmable 155mm Round Recessed

Start Downlight Flat 157 IP44 1000LM 830 DIM
0054120

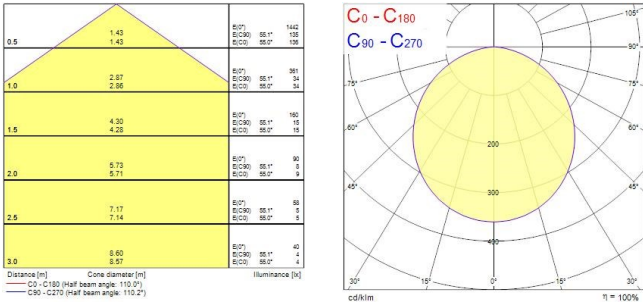

TECHNICAL DRAWINGS

