

## START DOWNLIGHT IP44 175

*START Downlight 175 IP44 DALI 1475Lm 840*

0030335



### Product features

- Ceiling recessed LED downlight IP44 (from the front), with only 55mm product depth and 175mm cutout. Supplied with DALI Tridonic push dim driver with loop in - out option (2800670). Ideal replacement for 1x32W/2x18W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 1475LM, 15W, 98lm/W, 4000K, Driver Current: 400mA, CRI80, 74° beam angle, IP44 from the front, IK07, (HxW) 55x195mm, Class 2, 220-240V. Meets TP(a) requirements.




### PRODUCT OVERVIEW

|                                 |                                           |
|---------------------------------|-------------------------------------------|
| Product name                    | START Downlight 175 IP44 DALI 1475Lm 840  |
| Technology                      | LED                                       |
| Cap/Base                        | N/A                                       |
| Housing                         | Aluminium                                 |
| Mount                           | Ceiling recessed mounting                 |
| General application             | Hospitality, Logistics & Industry, Office |
| ETIM Class                      | EC001744                                  |
| E-number FI                     | 4278161                                   |
| Warranty                        | 5 years                                   |
| Fixture luminous flux (lm)      | 1475                                      |
| Luminous flux (lm)              | 1475                                      |
| Luminaire efficacy (lm/W)       | 98                                        |
| LOR (%)                         | 100                                       |
| Colour temperature (K)          | 4000                                      |
| Light colour                    | Neutral White                             |
| CRI (Ra)                        | 80                                        |
| Colour Variation Initial (SDCM) | SDCM5                                     |
| Beam Angle (°)                  | 74                                        |
| Glare control                   | < 25                                      |
| Photobiological Risk Group      | RG0                                       |
| Total power consumption (W)     | 15                                        |
| Electrical protection           | Class II                                  |
| Control gear type               | LED driver constant current               |
| Dimmable                        | Yes                                       |
| Dimming method                  | DALI                                      |
| Minimum dimming level (%)       | 1                                         |
| LED Flickering Rate             | Ultra low (5% or less)                    |
| Housing colour                  | RAL 9003 - Signal white                   |
| IP rating                       | IP44/20                                   |
| IK rating                       | IK07                                      |
| Product EAN number              | 5410288303352                             |

START DOWNLIGHT IP44 175  
START Downlight 175 IP44 DALI 1475Lm 840  
0030335

PHOTOMETRY

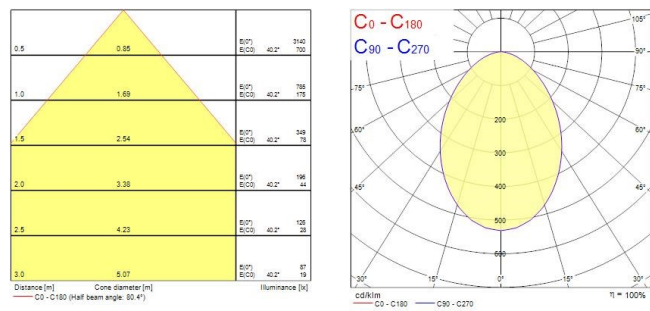

TECHNICAL DRAWINGS

