


Start Waterproof LED G3 fixed output
START Waterproof Single 1200 IP65 2800lm 840
0067947



Product features

- Start Waterproof, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing, Polycarbonate diffuser, 2750 lm, 22 W, 125 lm/W, 4000 K, drive current 350 mA, Non dimmable, CRI80, IP65, IK08, Class I, nominal average life (h):50000, 1278 mm x 84 mm x 75 mm ,energy class: A++ A+ A, D-mark

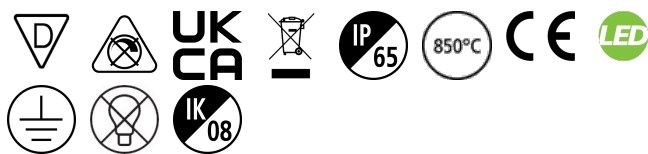


PRODUCT OVERVIEW

Product name	START Waterproof Single 1200 IP65 2800lm 840
Technology	LED
Housing	PC Polycarbonate
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4306947
Warranty	5 years
Fixture luminous flux (lm)	2750
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	22
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288679471

PHOTOMETRY

Start Waterproof LED G3 fixed output
START Waterproof Single 1200 IP65 2800lm 840
0067947

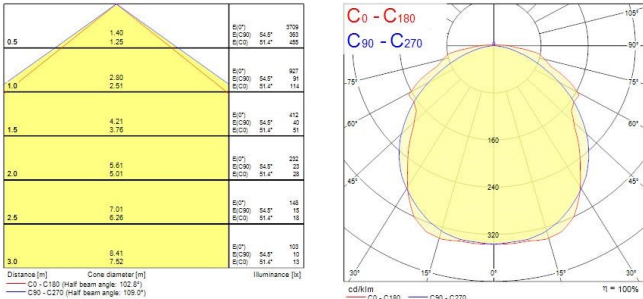

TECHNICAL DRAWINGS

