


Start Waterproof LED G3 Emergency
START Waterproof Single 1500 IP65 EM 4000lm 840
0067961



Product features

- Start Waterproof, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, 301 stainless steel diffuser clips and fixing brackets for surface and wall mounting. Polycarbonate housing, Polycarbonate diffuser, 3950lm, 37 W, 107 lm/W, 4000 K, drive current 1050 mA, non dimmable, 3 hours emergency, CRI 80, IP65, IK08, Class I, nominal average life (h): 50000, 1578mm x 84mm x 75mm, energy class: A++ A+ A, D-mark




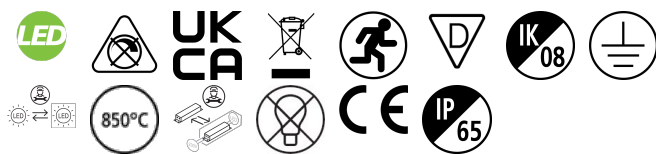


PRODUCT OVERVIEW

Product name	START Waterproof Single 1500 IP65 EM 4000lm 840
Technology	LED
Housing	PC Polycarbonate
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4309054
Warranty	5 years
Fixture luminous flux (lm)	3950
Luminaire efficacy (lm/W)	107
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	37
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288679617

PHOTOMETRY

Start Waterproof LED G3 Emergency
START Waterproof Single 1500 IP65 EM 4000lm 840
0067961



TECHNICAL DRAWINGS

