


Start Surface Slim IP54 - Square  
START SURFACE SLIM IP54 SQUARE 1900LM 2CCT D WH  
0043517



Product features

- Ceiling / wall square luminaire with integrated LED. Perfect solution for corridors, circulation areas or bathrooms. Even and uniform light in a slim but robust design. Power 18W, lumen output 1900 lumens, lumen efficacy 105 lm/W, dual color temperature (3000K/4000K). Supplied with phase dimming driver (leading edge/trailing edge). Mains Voltage 220-240V~. Body Size: 280mm square x 53mm height. IK07, IP54 Protection rating. PC Polycarbonate Opal diffuser. Low maintenance with 58000 hours LED lifespan expectancy. Warranty: 3 years.




PRODUCT OVERVIEW

|                                 |                                                 |
|---------------------------------|-------------------------------------------------|
| Product name                    | START SURFACE SLIM IP54 SQUARE 1900LM 2CCT D WH |
| Technology                      | LED                                             |
| Cap/Base                        | N/A                                             |
| Housing                         | PC Polycarbonate                                |
| Mount                           | Ceiling surface mounting, Wall surface mounted  |
| General application             | Hospitality                                     |
| ETIM Class                      | EC002892                                        |
| E-number FI                     | 4278401                                         |
| Warranty                        | 3 years                                         |
| Fixture luminous flux (lm)      | 1900                                            |
| Luminaire efficacy (lm/W)       | 105                                             |
| Light colour                    | Neutral White                                   |
| CRI (Ra)                        | 80                                              |
| Colour Variation Initial (SDCM) | SDCM4                                           |
| Beam Angle (°)                  | 120                                             |
| Photobiological Risk Group      | RG0                                             |
| Total power consumption (W)     | 18                                              |
| Electrical protection           | Class II                                        |
| Control gear type               | LED driver constant current                     |
| Dimmable                        | Yes                                             |
| Dimming method                  | Mains: leading / trailing edge                  |
| LED Flickering Rate             | Ultra low (5% or less)                          |
| Housing colour                  | White                                           |
| IP rating                       | IP54                                            |
| IK rating                       | IK07                                            |
| Product EAN number              | 5410288435176                                   |

PHOTOMETRY

Start Surface Slim IP54 - Square  
START SURFACE SLIM IP54 SQUARE 1900LM 2CCT D WH  
0043517

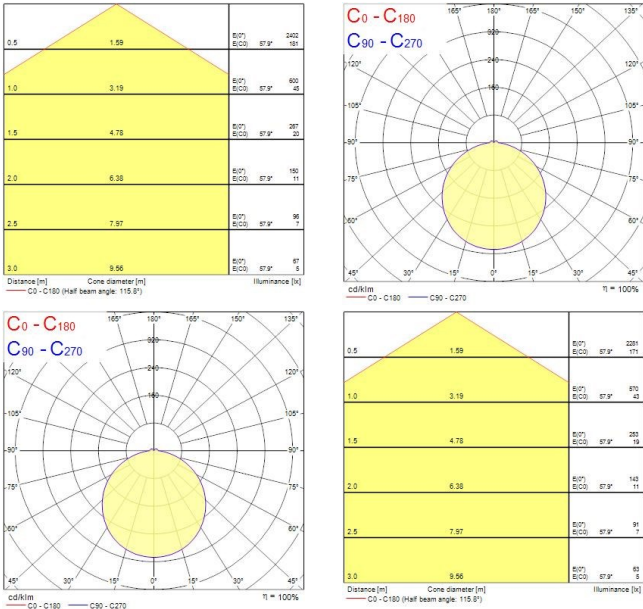

TECHNICAL DRAWINGS

