

Sylproof Superia LED G3 Emergency SYLPROOF SUPERIA LED G3 1500mm Single 4K E3 0048722

Product features



Sylproof Superia, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear
prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless
steel diffuser clips and fixing brackets for surface and wall mounting. L 1578 mm x W 84 mm x H 75
mm size, Polycarbonate housing, Polycarbonate diffuser, Non dimmable, 3 hour emergency, 4000K,
CRI80, 4800 lm, 33 W, 145 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class
LIK08, IP65.






















PRODUCT OVERVIEW

Product name	SYLPROOF SUPERIA LED G3 1500mm Single 4K E3
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (Im)	4800
Luminaire efficacy (Im/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	100
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	220
Luminous flux (emergency) (lm)	220
Total power consumption (W)	33
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288487229

PHOTOMETRY



Sylproof Superia LED G3 Emergency SYLPROOF SUPERIA LED G3 1500mm Single 4K E3 0048722

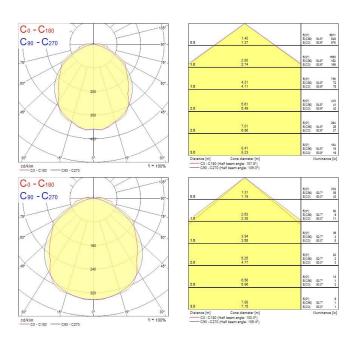

TECHNICAL DRAWINGS

