

Start Highbay


START Highbay IP65 1-10V 13000lm 865 WB

0039350



Product features

- START Highbay, includes 1 m cables, black aluminium housing, 13,000 Lm, 100 W, 130 Lm/W, 6500 K, drive current: 2140 mA, CRI 80, 90° beam angle, 1-10 V dimmable, IP65, IK08, 54,000 hrs (L80/B50), (D x H) 270 x 170 mm, 1 m mains cable, 1 m control cable, 1.2 m chain lenght including hooks

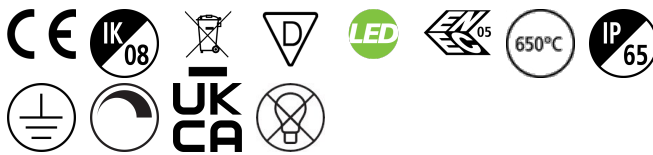








PRODUCT OVERVIEW

Product name	START Highbay IP65 1-10V 13000lm 865 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4306965
E-number SE	7214419
Warranty	5 years
Fixture luminous flux (lm)	13000
Luminaire efficacy (lm/W)	130
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	90
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	100
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes
Dimming method	1-10V (Analogue)
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288393506

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.99 0.96	5721 5116 4337 3639
1.0	1.97 1.90	7322 6516 4337 3639
1.5	2.96 2.86	3284 2911 1931 1623
2.0	3.94 3.81	1681 1467 969 812
2.5	4.93 4.76	1172 1014 651 544
3.0	5.92 5.71	874 761 497 416

Distance [m] Cone diameter [m] Illuminance [lx]

C0 - C130 (Half beam angle: 87.2°)
 C80 - C270 (Half beam angle: 89.2°)



Page 2 of 3

Start Highbay

START Highbay IP65 1-10V 13000lm 865 WB

0039350

