


Kalani Asymmetric
Kalani IP66 6KLM 840 ASYM
0048535



Product features

- Exterior LED Floodlight, comes complete with 1500mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 4000K, Non-dimming, 6450lm, 50W, 129lm/W, CRI80, Asymmetrical Wide beam angle (65° x 120° imax@55°), 100000 hrs L80B20 lifespan, 314 x 240 x 63mm (LxWxD) dimensions, 2.5kg weight.

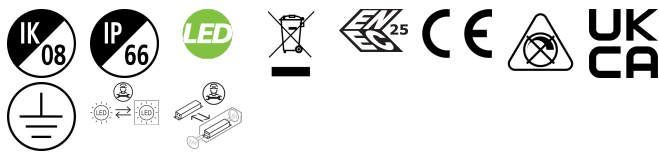


PRODUCT OVERVIEW

Product name	Kalani IP66 6KLM 840 ASYM
Technology	LED
General application	Logistics & Industry
ETIM Class	EC001744
E-number FI	4579566
Warranty	5 years
Fixture luminous flux (lm)	6450
Luminaire efficacy (lm/W)	129
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	65°x120°
Photobiological Risk Group	RG1
Total power consumption (W)	50
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
IP rating	IP66
IK rating	IK08
Product EAN number	5410288485355

PHOTOMETRY

Kalani Asymmetric
Kalani IP66 6KLM 840 ASYM
0048535



TECHNICAL DRAWINGS

