

## Giotto LED 305


### GIOTTO 305 4000K RECESSED 1-10V MW SENSOR

#### 3034778



#### Product features

- Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1750lm, 14.7W, 119lm/W, 4000K, CRI 80, 1-10V dimmable, integral microwave sensor. 100,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.

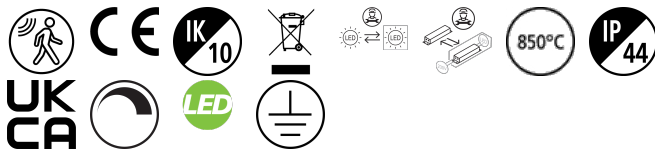

#### PRODUCT OVERVIEW

|                                 |                                           |
|---------------------------------|-------------------------------------------|
| Product name                    | GIOTTO 305 4000K RECESSED 1-10V MW SENSOR |
| Technology                      | LED                                       |
| Cap/Base                        | N/A                                       |
| Housing                         | PC Polycarbonate                          |
| Mount                           | Ceiling recessed mounting                 |
| Environment                     | Indoor                                    |
| General application             | Hospitality, Logistics & Industry         |
| ETIM Class                      | EC002892                                  |
| E-number FI                     | 4270189                                   |
| Warranty                        | 5 years                                   |
| Fixture luminous flux (lm)      | 1690                                      |
| Luminous flux (lm)              | 1690                                      |
| Luminaire efficacy (lm/W)       | 89                                        |
| Colour temperature (K)          | 4000                                      |
| Colour Code                     | 840                                       |
| Light colour                    | Neutral White                             |
| CRI (Ra)                        | 80                                        |
| Colour Variation Initial (SDCM) | SDCM3                                     |
| Beam Angle (°)                  | 120                                       |
| Glare control                   | < 25                                      |
| Photobiological Risk Group      | RG0                                       |
| Total power consumption (W)     | 19                                        |
| Electrical protection           | Class I                                   |
| Control gear type               | LED driver constant current               |
| Control gear mounting           | Integrated                                |
| Dimmable                        | Yes                                       |
| Dimming method                  | 1-10V (Analogue)                          |
| LED Flickering Rate             | Ultra low (5% or less)                    |
| Housing colour                  | White                                     |
| IP rating                       | IP44                                      |
| IK rating                       | IK10                                      |
| Product EAN number              | 8711971347781                             |

## Giotto LED 305

GIOTTO 305 4000K RECESSED 1-10V MW SENSOR

3034778

### DATA TABLE

#### General data

|                                         |                                           |
|-----------------------------------------|-------------------------------------------|
| Product name                            | GIOTTO 305 4000K RECESSED 1-10V MW SENSOR |
| Technology                              | LED                                       |
| Cap/Base                                | N/A                                       |
| Housing                                 | PC Polycarbonate                          |
| Mount                                   | Ceiling recessed mounting                 |
| Environment                             | Indoor                                    |
| General application                     | Hospitality, Logistics & Industry         |
| Operating temperature range (°C)        | -25°C...+25°C                             |
| Performance ambient temperature Tq (°C) | 25                                        |
| ETIM Class                              | EC002892                                  |
| E-number FI                             | 4270189                                   |
| Warranty                                | 5 years                                   |

#### Optical data

|                                              |               |
|----------------------------------------------|---------------|
| Fixture luminous flux (lm)                   | 1690          |
| Luminous flux (lm)                           | 1690          |
| Luminaire efficacy (lm/W)                    | 89            |
| Colour temperature (K)                       | 4000          |
| Colour Code                                  | 840           |
| Light colour                                 | Neutral White |
| CRI (Ra)                                     | 80            |
| Colour Variation Initial (SDCM)              | SDCM3         |
| Adjustable chromaticity                      | N             |
| Beam Angle (°)                               | 120           |
| Glare control                                | < 25          |
| Photobiological Risk Group                   | RG0           |
| Lumen maintenance at end of nominal life (%) | 80            |

#### Electrical data

|                                                          |                             |
|----------------------------------------------------------|-----------------------------|
| Total power consumption (W)                              | 19                          |
| Mains voltage (V)                                        | 220-240V                    |
| Lamp power factor                                        | 0.95                        |
| Electrical protection                                    | Class I                     |
| Control gear required                                    | No                          |
| Control gear type                                        | LED driver constant current |
| Control gear mounting                                    | Integrated                  |
| Dimmable                                                 | Yes                         |
| Dimming method                                           | 1-10V (Analogue)            |
| Drive current (mA)                                       | 600                         |
| Glow Wire Test (°C)                                      | 850                         |
| Energy Efficiency Class (A->G) of contained light source | D                           |
| Nominal Frequency (Hz)                                   | 50/60Hz                     |
| LED Flickering Rate                                      | Ultra low (5% or less)      |

## Giotto LED 305

*GIOTTO 305 4000K RECESSED 1-10V MW SENSOR*

3034778

|                                   |     |
|-----------------------------------|-----|
| Max. Luminaires per 10A C Breaker | 52  |
| Max. Luminaires per 16A C Breaker | 85  |
| Max. Luminaires per 20A C Breaker | 104 |
| Max. Luminaires per 10A B Breaker | 31  |
| Max. Luminaires per 16A B Breaker | 50  |
| Max. Luminaires per 20A B Breaker | 62  |

### Lifetime data

|                  |       |
|------------------|-------|
| Lifespan L70 B50 | 60000 |
| Lifespan L70 B10 | 60000 |
| Lifespan L80 B50 | 60000 |
| Lifespan L80 B10 | 60000 |
| Lifespan L90 B50 | 40000 |
| Lifespan L90 B10 | 32000 |

### Physical data

|                               |                  |
|-------------------------------|------------------|
| Housing colour                | White            |
| IP rating                     | IP44             |
| IK rating                     | IK10             |
| Diffuser finish               | Opal             |
| Diffuser material             | PC Polycarbonate |
| Nominal Product Height (mm)   | 104              |
| Nominal Product Diameter (mm) | 325              |
| Weight (kg)                   | 1.11             |
| Recessed Depth (mm)           | 41               |

### Packaging


|                                       |                |
|---------------------------------------|----------------|
| Single packaging type                 | Carton         |
| Product EAN number                    | 8711971347781  |
| Packaging single length / height (cm) | 32.5           |
| Packaging single width (cm)           | 32.5           |
| Packaging single depth (cm)           | 10.0           |
| DUN14 (outer)                         | 08711971347781 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 32.5           |
| Packaging outer width (cm)            | 32.5           |
| Packaging outer depth (cm)            | 10.0           |

### Safety data

|                                  |        |
|----------------------------------|--------|
| Optimal operating condition (°C) | -25-25 |
|----------------------------------|--------|

## PHOTOMETRY

Giotto LED 305  
GIOTTO 305 4000K RECESSED 1-10V MW SENSOR  
3034778

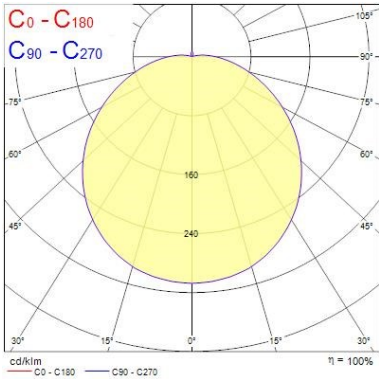

| Distance [m] | Cone diameter [m] | Beam spread [°] | Beam spread [°] | Illuminance [lx] |
|--------------|-------------------|-----------------|-----------------|------------------|
| 0.5          | 1.59              | 115.6°          | 57.8°           | 2078             |
| 1.0          | 3.18              | 115.6°          | 57.8°           | 520              |
| 1.5          | 4.76              | 115.6°          | 57.8°           | 231              |
| 2.0          | 6.35              | 115.6°          | 57.8°           | 130              |
| 2.5          | 7.94              | 115.6°          | 57.8°           | 83               |
| 3.0          | 9.53              | 115.6°          | 57.8°           | 58               |

TECHNICAL DRAWINGS

