

SylSafe Bay
SylSafe Bay MB C EM3 NM MS
0041735



Product features


- SylSafe Bay MB C EM3 NM MS is a dust and waterproof surface mounted emergency luminaire for industrial applications. Midbay optics for medium ceiling heights. Non-maintained 3hr emergency duration with NiMH rechargeable battery. Recharge period 24 hours. 200lm, 3W, IK03, IP65. Power Factor 0.44. Class II electrical construction.



PRODUCT OVERVIEW

Product name	SylSafe Bay MB C EM3 NM MS
Technology	LED
Type	LED
Mount	Ceiling surface mounting
General application	Office, Hospitality, Retail, Museums & Galleries, Education, Logistics & Industry
ETIM Class	EC001957
Warranty	5 years
Fixture luminous flux (lm)	200
Luminaire efficacy (lm/W)	67
Colour temperature (K)	5700
CRI (Ra)	75
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	200
Light source included	INTEGRATED LED
Electrical protection	Class II
Housing colour	White
IP rating	IP65
IK rating	IK03
Product EAN number	5410288417356

PHOTOMETRY

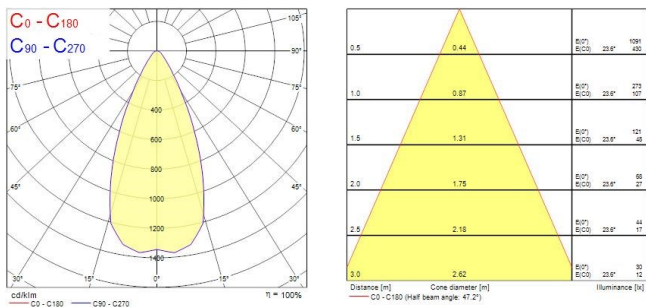

SylSafe Bay

SylSafe Bay MB C EM3 NM MS

0041735

TECHNICAL DRAWINGS

