

Start Flood Flat PIR
Start Flood Flat IP54 PIR 3000LM 840 Black
0050138



Product features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 3000 lm, 28 W, 107 lm/W, 4000K, non dimmable, CRI>80, IP54, IK06 - fixture, IK05 - sensor, Class I, lifespan L70:B50: 90000 hrs, 201 x 156 x 57 mm (L x W x H). Weight: 0.575kg. PIR sensor included.




PRODUCT OVERVIEW

Product name	Start Flood Flat IP54 PIR 3000LM 840 Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted, Ceiling surface mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579542
Warranty	3 years
Fixture luminous flux (lm)	3000
Luminaire efficacy (lm/W)	107
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	28.0
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Low (6% - 20%)
Housing colour	Black
IP rating	IP54
IK rating	IK06
Product EAN number	5410288501383

PHOTOMETRY

Start Flood Flat PIR
Start Flood Flat IP54 PIR 3000LM 840 Black
0050138

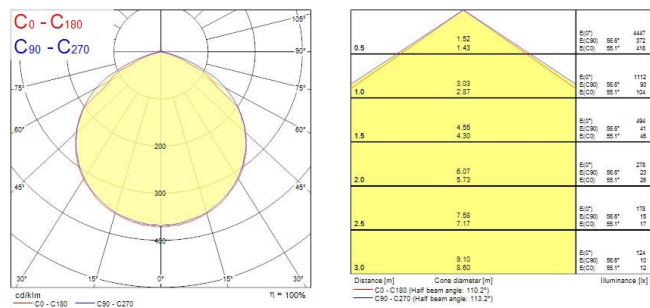

TECHNICAL DRAWINGS

