



START Flex High Output
START Flex IP20 830 10750lm
0068114



Product features

- 5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 420 LEDs; 10750lm per 5m (2150lm per 1m); 24V; 3000K; CRI80; SDCM 3. Needs to be used with any aluminium profile for cooling LED chips purpose and therefore assuring longer lifetime (Profile HO Surface 16 0022604 can be used) ;Compatible with emergency packs: 0046600, 0046601

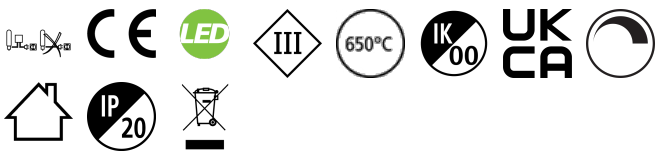


PRODUCT OVERVIEW

Product name	START Flex IP20 830 10750lm
Technology	LED
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276900
Warranty	5 years
Fixture luminous flux (lm)	10750
Luminaire efficacy (lm/W)	130
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Total power consumption (W)	82.5
Electrical protection	Class III
Dimmable	Yes
Dimming method	Other
IP rating	IP20
IK rating	IK00
Product EAN number	5410288681146


PHOTOMETRY

START Flex High Output
START Flex IP20 830 10750lm
0068114



0.5	1.34 1.52	E(0°) E(90°) E(180°)	3205 324 248
1.0	2.67 3.04	E(0°) E(90°) E(180°)	151 91 62
1.5	4.01 4.57	E(0°) E(90°) E(180°)	334 35 25
2.0	5.35 6.08	E(0°) E(90°) E(180°)	188 20 15
2.5	6.69 7.61	E(0°) E(90°) E(180°)	120 13 10
3.0	8.02 9.13	E(0°) E(90°) E(180°)	83 9 7

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 113.4°)
C90 - C270 (Half beam angle: 106.4°)



TECHNICAL DRAWINGS

