


Kalani Symmetric
Kalani IP66 13KLM 840 WB
0048536



Product features

- Exterior LED Floodlight, comes complete with 1500mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 4000K, Non-dimming, 14000lm, 100W, 140lm/W, CRI80, Symmetrical Wide beam angle (60°), 100000 hrs L80B20 lifespan, 418 x 330 x 77mm (LxWxD) dimensions, 3.9kg weight.


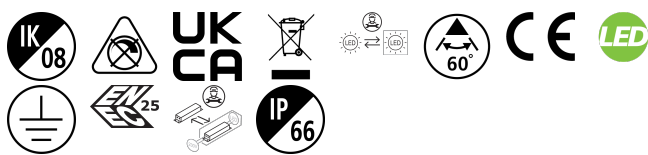


PRODUCT OVERVIEW

Product name	Kalani IP66 13KLM 840 WB
Technology	LED
General application	Logistics & Industry
ETIM Class	EC001744
E-number FI	4579567
Warranty	5 years
Fixture luminous flux (lm)	14000
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Photobiological Risk Group	RG1
Total power consumption (W)	100
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
IP rating	IP66
IK rating	IK08
Product EAN number	5410288485362

PHOTOMETRY

Kalani Symmetric
Kalani IP66 13KLM 840 WB
0048536



TECHNICAL DRAWINGS

