

Officelyte LED


OFFICELYTE 600X600 HO 4K EM

2069258



Product features

- Concord OFFICELYTE 600X600 HO 4K EM is a high performance low glare luminaire for offices and education applications. Ceiling recessed 600x600mm. Micro Prismatic optics. White RAL 9010. Constant current driver. 3 hours emergency operation with integral batteries. 4000K Neutral White LED, Typical CRI=85, chromaticity tolerance of 3-step MacAdam ellipse, lumen package of 4,350lm, total power consumption 35W, efficacy of 124lm/W. Lifespan 120,000 hours L70B50, 58,000 hours L80B20, UGR<19. IK02, IP20, Electrical Protection Class I, Photobiological Risk Group 1. PMMA diffuser, Glow Wire test 650°C.

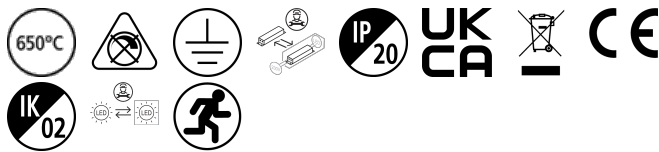


PRODUCT OVERVIEW

Product name	OFFICELYTE 600X600 HO 4K EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Office, Hospitality, Retail, Education
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4350
Luminous flux (lm)	4350
Luminaire efficacy (lm/W)	124
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	233
Total power consumption (W)	35
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5025768692583

Officelyte LED
OFFICELYTE 600X600 HO 4K EM
2069258

PHOTOMETRY

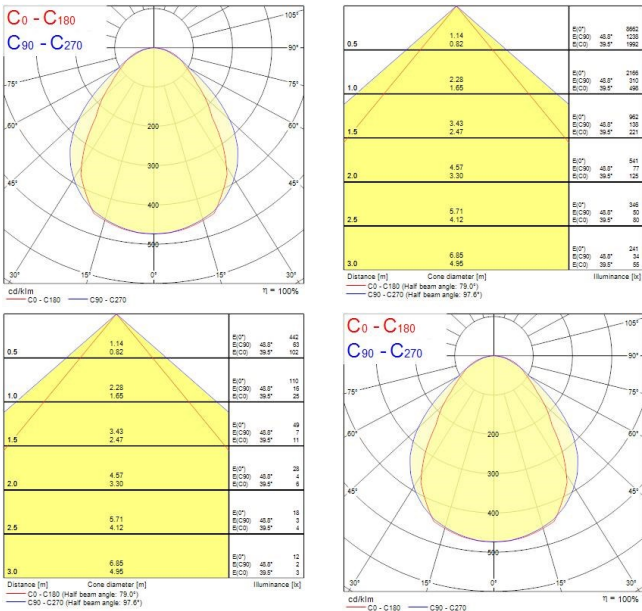

TECHNICAL DRAWINGS

