

START eco Panel 600x600


START eco Panel 600x600 3200Lm 865

0047671



Product features

- Back lit LED panel, Low Flicker, 36 W, Cool White, 6500 K, 3200 lumens, 89 lm/W, Average lifespan: 100.000Hrs, electronic non dimmable driver. (HxWxD) 34 x 595 x 595 mm.

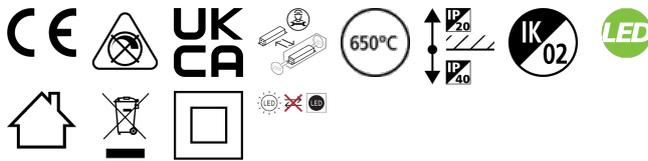

PRODUCT OVERVIEW


Product name	START eco Panel 600x600 3200Lm 865
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
Warranty	3 years
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	89
Colour temperature (K)	6500
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	112
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK02
Product EAN number	5410288476711

PHOTOMETRY

START eco Panel 600x600

START eco Panel 600x600 3200Lm 865
0047671

0.5	1.52	E(0°) E(C0) 86.9°	402 381
1.0	3.03	E(0°) E(C0) 86.9°	101 92
1.5	4.55	E(0°) E(C0) 86.9°	48 41
2.0	6.07	E(0°) E(C0) 86.9°	21 23
2.5	7.58	E(0°) E(C0) 86.9°	17 15
3.0	9.10	E(0°) E(C0) 86.9°	12 11
Distance [m]	Cone diameter [m]	Illuminance [lx]	
C0 - C180 (Half beam angle: 113.2°)			



TECHNICAL DRAWINGS

