


## Monitor LED

MONITOR IP55 IK10 1377LM 830 BLACK EM3  
4063826



### Product features

- Led exterior bulkhead, Unique feature allowing a choice between High Output or High Efficiency with the flick of a switch, die-cast aluminium body, 717/1377LM, 9/17W, 80/81LM/W, 4000K, Driver Current: 350/750mA, CRI80, Non dimmable, Emergency, IP55,IK10, lifespan 100,000hrs (L70:B50), (HxWxD)350 x 350 x 128mm, 4kg, 3 step MacAdam ellipse, RAL 9005, Class 1, 230V, energy class: A++, A+, A

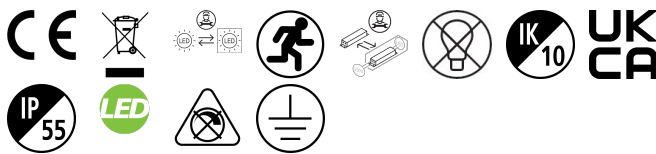

### PRODUCT OVERVIEW

Product name	MONITOR IP55 IK10 1377LM 830 BLACK EM3
Technology	LED
Environment	Indoor, Outdoor
General application	Education, Hospitality, Logistics & Industry, Office, Residential & Consumer, Retail
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	717/1377
Luminaire efficacy (lm/W)	72
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Photobiological Risk Group	RG1
Total power consumption (W)	11/19
Electrical protection	Class I
Dimmable	No
Housing colour	Black
IP rating	IP55
IK rating	IK10
Product EAN number	5026524638265

### PHOTOMETRY


## Monitor LED

*MONITOR IP55 IK10 1377LM 830 BLACK EM3*  
4063826

0.5	1.53	E(0°)	219
	1.53	E(C90)	15
	1.53	E(C180)	15
1.0	3.06	E(0°)	88
	3.07	E(C90)	6
	3.07	E(C180)	6
1.5	4.58	E(0°)	24
	4.60	E(C90)	2
	4.60	E(C180)	2
2.0	6.11	E(0°)	14
	6.14	E(C90)	1
	6.14	E(C180)	1
2.5	7.64	E(0°)	9
	7.67	E(C90)	1
	7.67	E(C180)	1
3.0	9.17	E(0°)	6
	9.20	E(C90)	1
	9.20	E(C180)	0

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 113.6°)  
— C90 - C270 (Half beam angle: 113.6°)

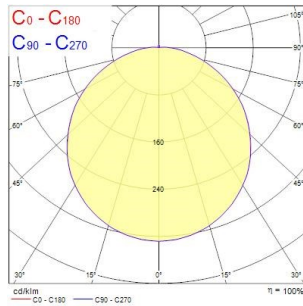

## TECHNICAL DRAWINGS

