

Inverto Direct/Indirect

Inverto Dir/Ind WW 1-10V Rust

3080104



Product features

- Surface Wall mounted direct / indirect luminaire, wire to base with pluggable connection for easy installation, suitable for looping, rust coloured aluminium housing, 3130lm (2 x 1565lm), 30W, 104lm/W, 3000K, 350mA, CRI:80, 40° beam Angle, 1-10V dimmable, IP65, IK07, lifespan: 60,000hrs (L80:B20), 23.00x32.2x11.5mm.




PRODUCT OVERVIEW

Product name	Inverto Dir/Ind WW 1-10V Rust
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Internal/External
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579312
E-number SE	7703140
Warranty	5 years
Fixture luminous flux (lm)	3130
Luminaire efficacy (lm/W)	104
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	30
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	1-10V (Analogue)
Minimum dimming level (%)	5
IP rating	IP65
IK rating	IK07
Product EAN number	8711971801047

PHOTOMETRY

Inverso Direct/Indirect
Inverso Dir/Ind WW 1-10V Rust
3080104

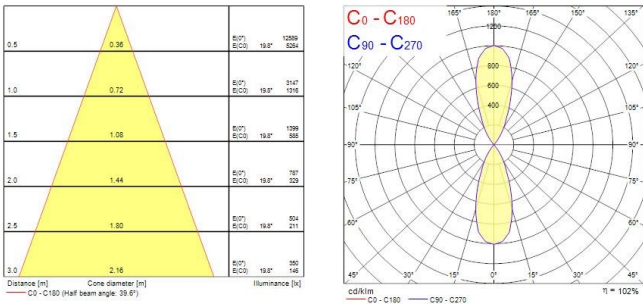

TECHNICAL DRAWINGS

