


## Raiden 30KLM

*Raiden IP66 30KLM 840 Symmetric Wide DALI*  
2824100



### Product features

- Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 4000K, DALI dimmable, 30000lm, 221W, 136lm/W, CRI80, Symmetric Wide beam angle 60°, 100000 hrs L90B50 lifespan, 561x569x76mm (LxWxH) dimensions, 12.8kg weight. Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3 only with the separate wire guard accessory fitted.

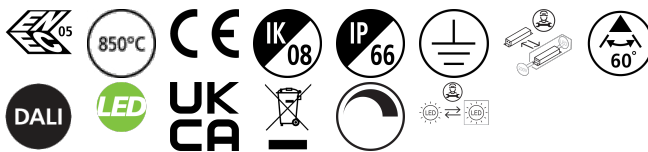



### PRODUCT OVERVIEW

|                                 |                                           |
|---------------------------------|-------------------------------------------|
| Product name                    | Raiden IP66 30KLM 840 Symmetric Wide DALI |
| Technology                      | LED                                       |
| Cap/Base                        | N/A                                       |
| Housing                         | Aluminium                                 |
| General application             | Logistics & Industry                      |
| ETIM Class                      | EC001744                                  |
| Warranty                        | 5 years                                   |
| Fixture luminous flux (lm)      | 30000                                     |
| Luminaire efficacy (lm/W)       | 136                                       |
| Colour temperature (K)          | 4000                                      |
| Light colour                    | Neutral White                             |
| CRI (Ra)                        | 80                                        |
| Colour Variation Initial (SDCM) | SDCM3                                     |
| Beam Angle (°)                  | 60                                        |
| Photobiological Risk Group      | RG1                                       |
| Total power consumption (W)     | 221                                       |
| Electrical protection           | Class I                                   |
| Dimmable                        | Yes                                       |
| Dimming method                  | DALI-2                                    |
| Housing colour                  | RAL 9022 - Pearl light grey               |
| IP rating                       | IP66                                      |
| IK rating                       | IK08                                      |
| Product EAN number              | 5025768241002                             |

### PHOTOMETRY

## Raiden 30KLM

Raiden IP66 30KLM 840 Symmetric Wide DALI  
2824100



## TECHNICAL DRAWINGS

