


START eco Flex IP67 Outdoor
START ECO FLEX IP67 830 4825LM
0068106



Product features

- 5 metre IP67 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs; 4825lm per 5m (965lm per 1m); 24V; 3000K; CRI80; SDCM 3; supplied with 1m cable H05RN-F (2*0.75mm² cable).

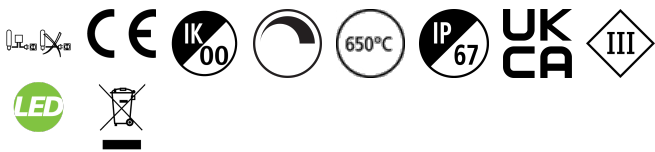


PRODUCT OVERVIEW


Product name	START ECO FLEX IP67 830 4825LM
Technology	LED
Housing	PVC
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276909
Warranty	3 years
Fixture luminous flux (lm)	4825
Luminaire efficacy (lm/W)	102
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Total power consumption (W)	47.5
Electrical protection	Class III
Dimmable	Yes
Dimming method	Other
Housing colour	White
IP rating	IP67
IK rating	IK00
Product EAN number	5410288681061

PHOTOMETRY

START eco Flex IP67 Outdoor
START ECO FLEX IP67 830 4825LM
0068106



0.5	1.05 1.37	E(0°) E(C90) E(C180)	1058 87.1° 83.9°	1058 105 114
1.0	3.09 2.74	E(0°) E(C90) E(C180)	327 87.1° 83.9°	327 26 33
1.5	4.64 4.11	E(0°) E(C90) E(C180)	148 87.1° 83.9°	148 12 15
2.0	6.18 5.49	E(0°) E(C90) E(C180)	82 87.1° 83.9°	82 7 9
2.5	7.73 6.96	E(0°) E(C90) E(C180)	52 87.1° 83.9°	52 4 5
3.0	9.27 8.23	E(0°) E(C90) E(C180)	36 87.1° 83.9°	36 3 4
Distance [m] Cone diameter [m] Illuminance [lx]				
—— C0 - C180 (Half beam angle: 180°)				
—— C90 - C270 (Half beam angle: 114.2°)				



TECHNICAL DRAWINGS

