Equinox EQUINOX 165 2500 TRIMLESS 940 DALI 2059955

Product features



Equinox is an elegant and innovative luminaire designed using the latest optical technology. It is a high quality and efficient lighting solution for office, hospitality, and retail environments. It creates inspirational halo effects regulated by a unique adjustable optic system. It is DALI dimmable downlight luminaire, Colour rendering index Ra >90, Colour temperature: 4000K Neutral White, Class II, Cut out dimensions: 165mm. Low Glare UGR<19.




























PRODUCT OVERVIEW

Technology Cap/Base N/A Housing Aluminium Mount Ceiling recessed mounting General application ETIM Class EC001744 Warranty 5 years Fixture luminous flux (Im) Luminaire efficacy (Im/W) Colour temperature (K) Light colour Neutral White CRI (Ra) Colour Variation Initial (SDCM) SDCM3 Colour Consistency (SDCM) Beam Angle (°) Glare control Photobiological Risk Group RG1
Housing Aluminium Mount Ceiling recessed mounting General application Office ETIM Class EC001744 Warranty 5 years Fixture luminous flux (Im) 2500 Luminaire efficacy (Im/W) 125 Colour temperature (K) 4000 Light colour Neutral White CRI (Ra) 90 Colour Variation Initial (SDCM) SDCM3 Colour Consistency (SDCM) 3 Beam Angle (°) 64 Glare control < 19 Photobiological Risk Group RG1
Mount Ceiling recessed mounting General application Office ETIM Class EC001744 Warranty 5 years Fixture luminous flux (Im) 2500 Luminaire efficacy (Im/W) 125 Colour temperature (K) 4000 Light colour Neutral White CRI (Ra) 90 Colour Variation Initial (SDCM) SDCM3 Colour Consistency (SDCM) 3 Beam Angle (°) 64 Glare control < 19 Photobiological Risk Group RG1
General application ETIM Class EC001744 Warranty 5 years Fixture luminous flux (Im) Luminaire efficacy (Im/W) 125 Colour temperature (K) 4000 Light colour Neutral White CRI (Ra) 90 Colour Variation Initial (SDCM) SDCM3 Colour Consistency (SDCM) 3 Beam Angle (°) 64 Glare control Photobiological Risk Group RG1
ETIM Class EC001744 Warranty 5 years Fixture luminous flux (Im) 2500 Luminaire efficacy (Im/W) 125 Colour temperature (K) 4000 Light colour Neutral White CRI (Ra) 90 Colour Variation Initial (SDCM) SDCM3 Colour Consistency (SDCM) 3 Beam Angle (°) 64 Glare control < 19 Photobiological Risk Group RG1
Warranty 5 years Fixture luminous flux (Im) 2500 Luminaire efficacy (Im/W) 125 Colour temperature (K) 4000 Light colour Neutral White CRI (Ra) 90 Colour Variation Initial (SDCM) SDCM3 Colour Consistency (SDCM) 3 Beam Angle (°) 64 Glare control < 19 Photobiological Risk Group RG1
Fixture luminous flux (Im) 2500 Luminaire efficacy (Im/W) 125 Colour temperature (K) 4000 Light colour Neutral White CRI (Ra) 90 Colour Variation Initial (SDCM) SDCM3 Colour Consistency (SDCM) 3 Beam Angle (°) 64 Glare control < 19 Photobiological Risk Group RG1
Luminaire efficacy (Im/W) 125 Colour temperature (K) 4000 Light colour Neutral White CRI (Ra) 90 Colour Variation Initial (SDCM) SDCM3 Colour Consistency (SDCM) 3 Beam Angle (°) 64 Glare control < 19 Photobiological Risk Group RG1
Colour temperature (K) Light colour Neutral White CRI (Ra) 90 Colour Variation Initial (SDCM) SDCM3 Colour Consistency (SDCM) 3 Beam Angle (°) 64 Glare control Photobiological Risk Group RG1
Light colour CRI (Ra) 90 Colour Variation Initial (SDCM) SDCM3 Colour Consistency (SDCM) Beam Angle (°) Glare control Photobiological Risk Group RG1
CRI (Ra) 90 Colour Variation Initial (SDCM) SDCM3 Colour Consistency (SDCM) 3 Beam Angle (°) 64 Glare control <19 Photobiological Risk Group RG1
Colour Variation Initial (SDCM) SDCM3 Colour Consistency (SDCM) 3 Beam Angle (°) 64 Glare control < 19 Photobiological Risk Group RG1
Colour Consistency (SDCM) Beam Angle (°) Glare control Photobiological Risk Group RG1
Beam Angle (°) 64 Glare control < 19 Photobiological Risk Group RG1
Glare control < 19 Photobiological Risk Group RG1
Photobiological Risk Group RG1
Total never consumption (AA)
Total power consumption (W) 20
Electrical protection Class II
Control gear type LED driver constant current
Control gear mounting Remote
Dimmable Yes
Dimming method DALI, Switch-dim (mains-rated)
Minimum dimming level (%) 1
Housing colour RAL 9016 - Traffic white / Bezel
IP rating IP20
IK rating IK02
Product EAN number 5025768599554

Equinox *EQUINOX 165 2500 TRIMLESS 940 DALI* **2059955**

PHOTOMETRY

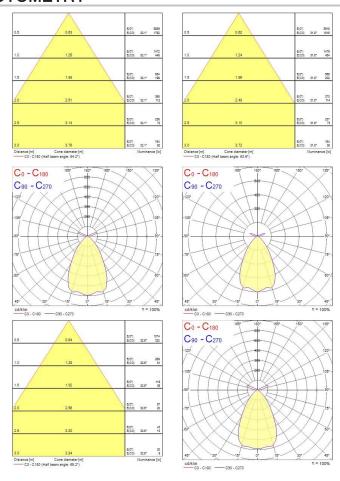

TECHNICAL DRAWINGS

