

Instar Trend 75 Swing IP44
INSTAR TREND SW IP44 INDOOR WH
3079060




- Product features
- INSTAR TREND SW IP44 INDOOR WH




PRODUCT OVERVIEW

Product name	INSTAR TREND SW IP44 INDOOR WH
Technology	Accessory
Cap/Base	GX5.3
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
E-number FI	4274923
E-number SE	7461923
E-number Norway	3223415
Warranty	3 years
LOR (%)	Dependent on lamp
Light source included	N/A - Not Applicable
Electrical protection	Class III
Control gear mounting	Remote
Housing colour	White
IP rating	IP44/20
IK rating	IK02
Product EAN number	8711971790600


PHOTOMETRY

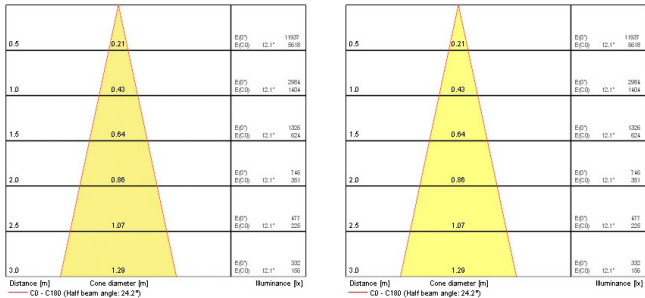

Instar Trend 75 Swing IP44 INSTAR TREND SW IP44 INDOOR WH 3079060

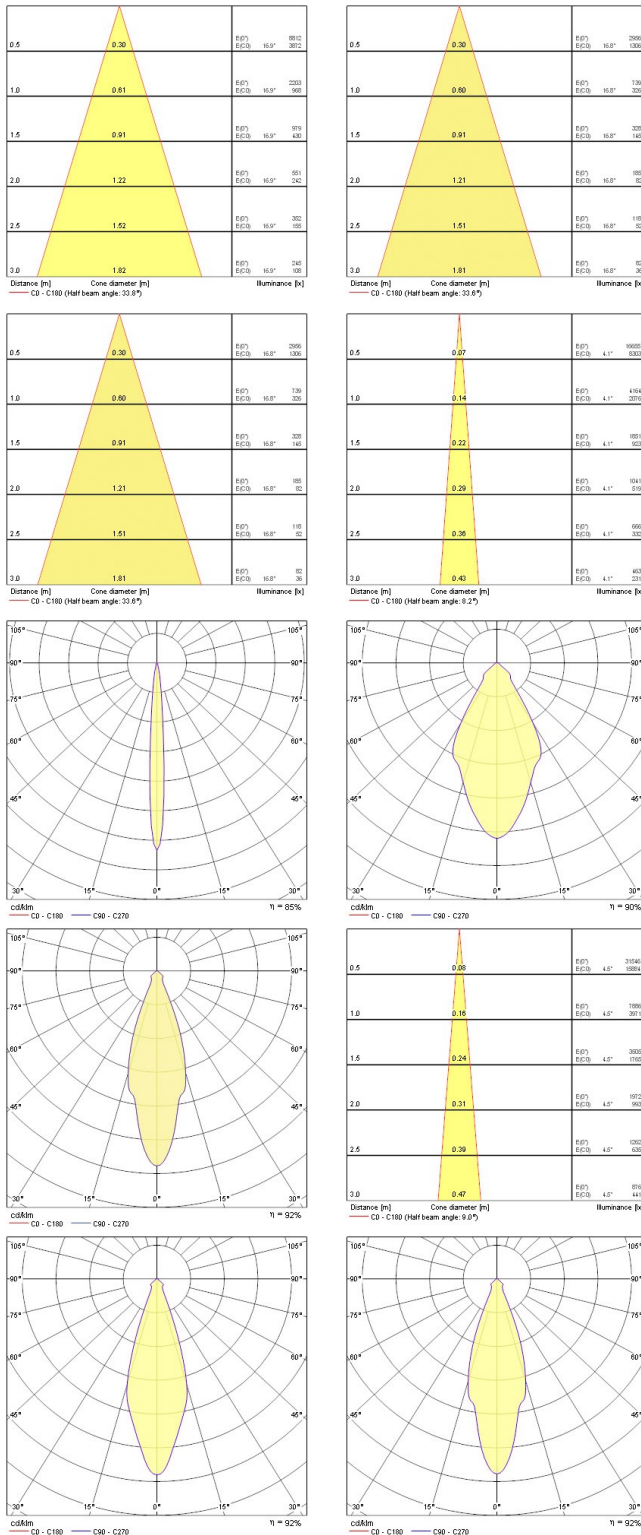


Instar Trend 75 Swing IP44 INSTAR TREND SW IP44 INDOOR WH 3079060




Distance [m]	Cone diameter [m]	EF7 EF(0)	EF(0) 18.0°
0.5	0.32	5104	2023
1.0	0.65	1276	506
1.5	0.97	567	247
2.0	1.30	319	129
2.5	1.62	204	89
3.0	1.95	142	62

Distance [m] Cone diameter [m] Illuminance [lx]
— C0 - C180 (Half beam angle: 18.0°)



Distance [m]	Cone diameter [m]	EF7 EF(0)	EF(0) 18.0°
0.5	0.32	5104	2023
1.0	0.65	1276	506
1.5	0.97	567	247
2.0	1.30	319	129
2.5	1.62	204	89
3.0	1.95	142	62

Distance [m] Cone diameter [m] Illuminance [lx]
— C0 - C180 (Half beam angle: 18.0°)



Distance [m]	Cone diameter [m]	EF7 EF(0)	EF(0) 18.0°
0.5	0.32	5104	2023
1.0	0.65	1276	506
1.5	0.97	567	247
2.0	1.30	319	129
2.5	1.62	204	89
3.0	1.95	142	62

Distance [m] Cone diameter [m] Illuminance [lx]
— C0 - C180 (Half beam angle: 18.0°)

Distance [m]	Cone diameter [m]	EF7 EF(0)	EF(0) 18.0°
0.5	0.32	5104	2023
1.0	0.65	1276	506
1.5	0.97	567	247
2.0	1.30	319	129
2.5	1.62	204	89
3.0	1.95	142	62

Distance [m] Cone diameter [m] Illuminance [lx]
— C0 - C180 (Half beam angle: 18.0°)

Distance [m]	Cone diameter [m]	EF7 EF(0)	EF(0) 18.0°
0.5	0.32	5104	2023
1.0	0.65	1276	506
1.5	0.97	567	247
2.0	1.30	319	129
2.5	1.62	204	89
3.0	1.95	142	62

Distance [m] Cone diameter [m] Illuminance [lx]
— C0 - C180 (Half beam angle: 18.0°)

Distance [m]	Cone diameter [m]	EF7 EF(0)	EF(0) 18.0°
0.5	0.32	5104	2023
1.0	0.65	1276	506
1.5	0.97	567	247
2.0	1.30	319	129
2.5	1.62	204	89
3.0	1.95	142	62

Distance [m] Cone diameter [m] Illuminance [lx]
— C0 - C180 (Half beam angle: 18.0°)

Instar Trend 75 Swing IP44

INSTAR TREND SW IP44 INDOOR WH
3079060

