


InVerto Direct
Inverto Direct NW ASYM Silver
 3081030



Product features

- Surface Wall mounted luminaire, wire to base with pluggable connection for easy installation, suitable for looping, silver coloured aluminium housing, 1,617lm, 16W, 101lm/W, 4000K, 350mA , CRI:80, Asymmetric beam Angle, non-dimmable, IP65, IK07, lifespan: 60,000hrs (L80:B20), 162 x 110 x 110 mm.

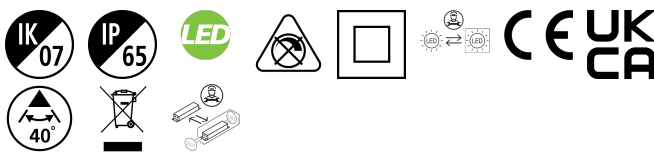

PRODUCT OVERVIEW


Product name	Inverto Direct NW ASYM Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Internal/External
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579338
Warranty	5 years
Fixture luminous flux (lm)	1617
Luminaire efficacy (lm/W)	101
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9022 - Pearl light grey
IP rating	IP65
IK rating	IK07
Product EAN number	8711971810308

PHOTOMETRY

InVerto Direct

Inverto Direct NW ASYM Silver

3081030



TECHNICAL DRAWINGS

