

Instar Trend 75 Swing IP44

INSTAR TREND SW IP44 INDOOR WH

3079060



Product features

- INSTAR TREND SW IP44 INDOOR WH



PRODUCT OVERVIEW

Product name	INSTAR TREND SW IP44 INDOOR WH
Technology	Accessory
Cap/Base	GX5.3
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
E-number FI	4274923
E-number SE	7461923
E-number Norway	3223415
Warranty	3 years
LOR (%)	Dependent on lamp
Light source included	N/A - Not Applicable
Electrical protection	Class III
Control gear mounting	Remote
Housing colour	White
IP rating	IP44/20
IK rating	IK02
Product EAN number	8711971790600

DATA TABLE

General data

Product name	INSTAR TREND SW IP44 INDOOR WH
Technology	Accessory
Cap/Base	GX5.3
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
E-number FI	4274923
E-number SE	7461923

Instar Trend 75 Swing IP44

INSTAR TREND SW IP44 INDOOR WH
3079060

E-number Norway	3223415
Warranty	3 years

Optical data

LOR (%)	Dependent on lamp
Adjustable chromaticity	N
Distribution type	Adjustable

Electrical data

Light source included	N/A - Not Applicable
Mains voltage (V)	12V
Electrical protection	Class III
Control gear mounting	Remote
Transformer required	Yes
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz

Physical data

Housing colour	White
IP rating	IP44/20
IK rating	IK02
Cutout Dimensions (W x L in mm or Diameter in mm)	75
Max. Lamp Diameter (mm) - D	95
Weight (kg)	0.164
Recessed Depth (mm)	90

Packaging









Single packaging type	Carton
Product EAN number	8711971790600
Packaging single length / height (cm)	13.2
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.4
DUN14 (outer)	18711971790607
Units per outer package	30
Packaging outer length / height (cm)	28.4
Packaging outer width (cm)	28.5
Packaging outer depth (cm)	53.2

PHOTOMETRY


Instar Trend 75 Swing IP44

INSTAR TREND SW IP44 INDOOR WH

3079060

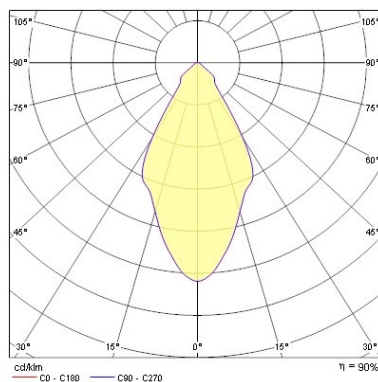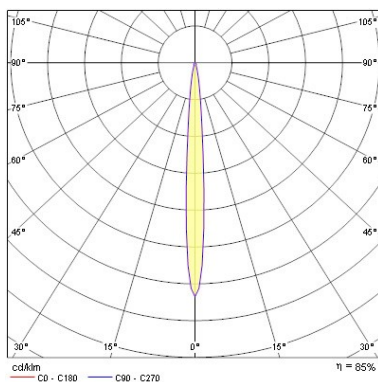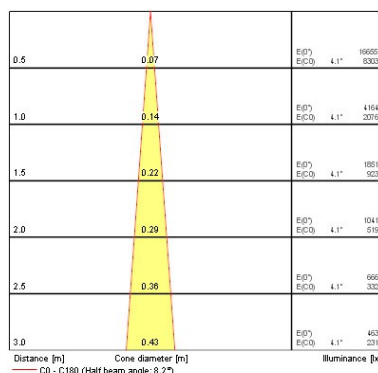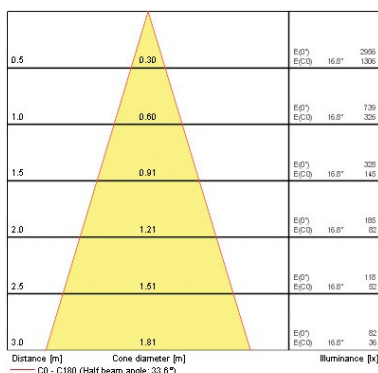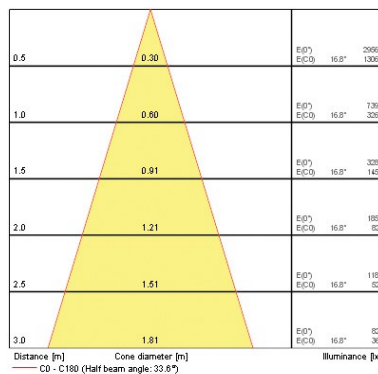
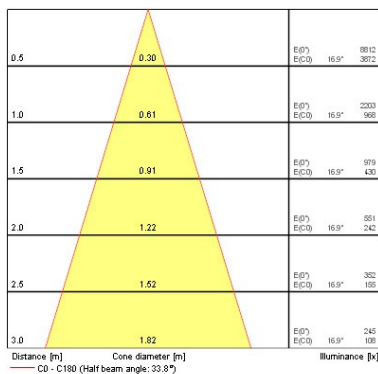
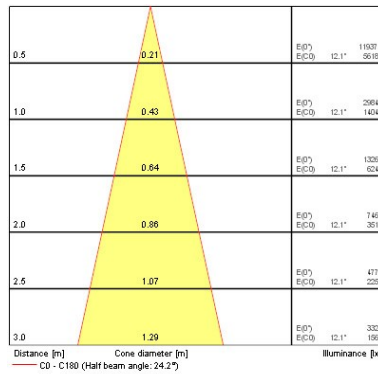
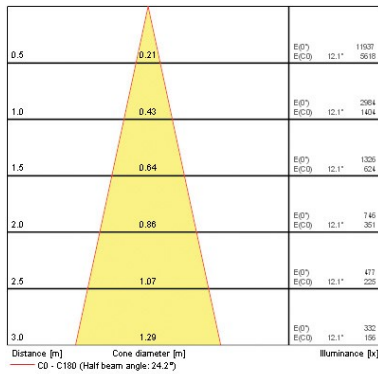


Instar Trend 75 Swing IP44 INSTAR TREND SW IP44 INDOOR WH 3079060

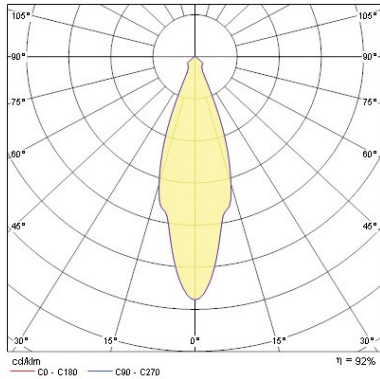


0.5	0.08	E(0°) E(C0) 4.5°	31545 15884
1.0	0.16	E(0°) E(C0) 4.5°	1896 361
1.5	0.24	E(0°) E(C0) 4.5°	3905 1765
2.0	0.31	E(0°) E(C0) 4.5°	1972 960
2.5	0.39	E(0°) E(C0) 4.5°	1262 630
3.0	0.47	E(0°) E(C0) 4.5°	816 441

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 9.0°)

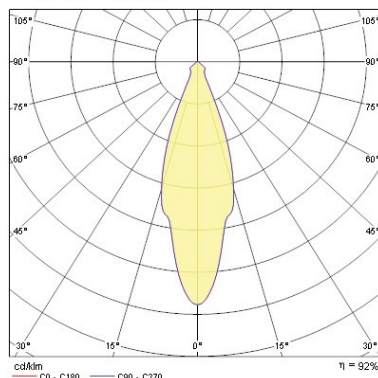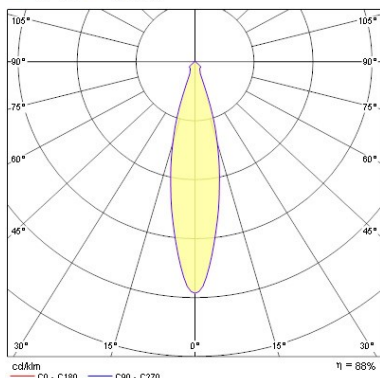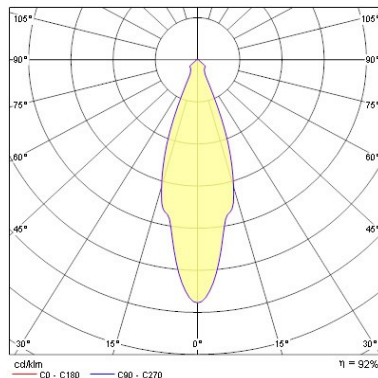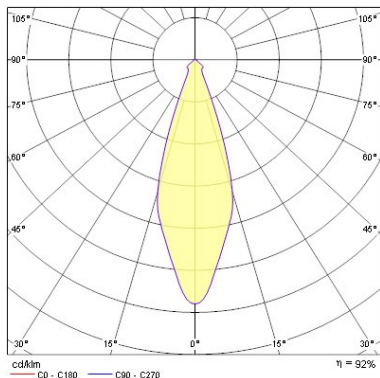

0.5	0.32	E(0°) E(C0) 18.0°	5104 2223
1.0	0.65	E(0°) E(C0) 18.0°	1278 556
1.5	0.97	E(0°) E(C0) 18.0°	867 247
2.0	1.30	E(0°) E(C0) 18.0°	319 139
2.5	1.62	E(0°) E(C0) 18.0°	204 89
3.0	1.95	E(0°) E(C0) 18.0°	142 62

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 36.0°)

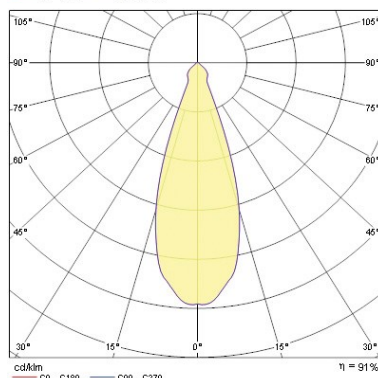

Instar Trend 75 Swing IP44 INSTAR TREND SW IP44 INDOOR WH 3079060

