

Optix Surface 1200 Asymmetric

OPTIX SURFACE 1200 ASYMMETRIC 4000K

2021679



Product features

- OPTIX SURFACE 1200 ASYMMETRIC 4000K is a surface or wall mounted LED Linear luminaire with Asymmetric Aluminium Reflector, Asymmetric Light Distribution, Luminaire Dimensions: 1200x200x50mm, Sylvania White body colour, IP20, IK07, Constant Current, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3480lm, 30W, 116lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, lifespan: 58,000 hours L90B10.



PRODUCT OVERVIEW

Product name	OPTIX SURFACE 1200 ASYMMETRIC 4000K
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4262044
Warranty	5 years
Fixture luminous flux (lm)	3480
Luminous flux (lm)	3480
Luminaire efficacy (lm/W)	116
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG0
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768216796

DATA TABLE

General data

Product name	OPTIX SURFACE 1200 ASYMMETRIC 4000K
--------------	-------------------------------------

Optix Surface 1200 Asymmetric

OPTIX SURFACE 1200 ASYMMETRIC 4000K

2021679

Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Education, Office
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4262044
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3480
Luminous flux (lm)	3480
Luminaire efficacy (lm/W)	116
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Asymmetric
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	30
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	300
Inrush Current (A)	15
Inrush Duration (µs)	100
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	30
Max. Luminaires per 13A C Breaker	39
Max. Luminaires per 16A C Breaker	48
Max. Luminaires per 20A C Breaker	60
Max. Luminaires per 10A B Breaker	30
Max. Luminaires per 13A B Breaker	39
Max. Luminaires per 16A B Breaker	48

Optix Surface 1200 Asymmetric

OPTIX SURFACE 1200 ASYMMETRIC 4000K
2021679

Max. Luminaires per 20A B Breaker	60
-----------------------------------	----

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	58000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Other
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	200
Nominal Product Height (mm)	50
Weight (kg)	3.8


Packaging

Single packaging type	Carton
Product EAN number	5025768216796
Packaging single length / height (cm)	122.0
Packaging single width (cm)	22.5
Packaging single depth (cm)	6.8
DUN14 (outer)	05025768216796
Units per outer package	1
Packaging outer length / height (cm)	122.0
Packaging outer width (cm)	22.5
Packaging outer depth (cm)	6.8

Safety data

Optimal operating condition (°C)	10-25
----------------------------------	-------

PHOTOMETRY

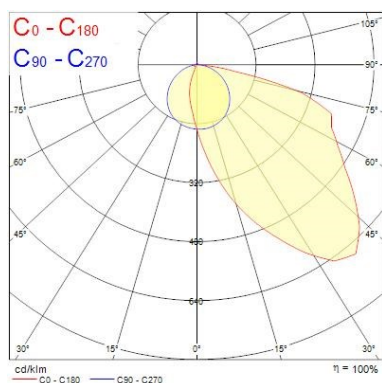

Optix Surface 1200 Asymmetric

OPTIX SURFACE 1200 ASYMMETRIC 4000K
2021679

TECHNICAL DRAWINGS

