


START Flex Low Output
START Flex IP20 827 2600lm
0068129



Product features

- 5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs ,24V; 2700K; CRI80; SDCM 3

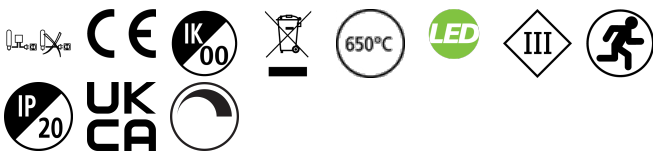


PRODUCT OVERVIEW


Product name	START Flex IP20 827 2600lm
Technology	LED
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276593
Warranty	5 years
Fixture luminous flux (lm)	2600
Luminaire efficacy (lm/W)	108
Colour temperature (K)	2700
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Light source included	INTEGRATED LED
Total power consumption (W)	24
Electrical protection	Class III
Dimmable	Yes
Dimming method	Other
IP rating	IP20
IK rating	IK00
Product EAN number	5410288681290

PHOTOMETRY

START Flex Low Output
START Flex IP20 827 2600lm
0068129



0.5	1.55 1.45	E(0°) E(C90) E(C180)	87.8° 87.8° 88.0°	666 54 91
1.0	3.15 2.97	E(0°) E(C90) E(C180)	87.8° 87.8° 88.0°	115 13 15
1.5	4.73 4.45	E(0°) E(C90) E(C180)	87.8° 87.8° 88.0°	76 6 7
2.0	6.30 5.93	E(0°) E(C90) E(C180)	87.8° 87.8° 88.0°	44 3 4
2.5	7.88 7.41	E(0°) E(C90) E(C180)	87.8° 87.8° 88.0°	28 2 2
3.0	9.45 8.90	E(0°) E(C90) E(C180)	87.8° 87.8° 88.0°	19 1 2
Distance [m] Cone diameter [m] Illuminance [lx]				
—— C0 - C180 (Half beam angle: 112.2°)				
—— C90 - C270 (Half beam angle: 115.2°)				



TECHNICAL DRAWINGS

