

## Start Surface Wall Round

START Surface Wall Round IP54 500lm Direct 2CCT

0047134



### Product features

- Round shaped exterior surface wall light with integrated LED, RAL9005 - Black Aluminium housing, light emission on one side, 500/480 lm, 6.7 W, 75/72 lm/W, 3000 or 4000K adjustable CCT, non dimmable, CRI>80, 220-240V, Class I, lifespan L70:B50: 90000 hrs IP54, IK07, 76 x 129 x 110mm (W x H x D). Weight: 0.55 kg.



## PRODUCT OVERVIEW

Product name	START Surface Wall Round IP54 500lm Direct 2CCT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall recessed, Wall surface mounted
General application	Residential & Consumer
ETIM Class	EC002892
E-number FI	4579601
Warranty	5 years
Fixture luminous flux (lm)	500
Luminaire efficacy (lm/W)	75
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	6.7
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9005 - Jet black
IP rating	IP54
IK rating	IK07
Product EAN number	5410288471341

## DATA TABLE

### General data

Product name	START Surface Wall Round IP54 500lm Direct 2CCT
Technology	LED
Cap/Base	N/A
Housing	Aluminium

## Start Surface Wall Round

*START Surface Wall Round IP54 500lm Direct 2CCT*

0047134

Mount	Wall recessed, Wall surface mounted
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC002892
E-number FI	4579601
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	500
Luminaire efficacy (lm/W)	75
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Luminous Intensity (cd)	803
Beam Angle (°)	40
Distribution type	Symmetric
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	6.7
Mains voltage (V)	220-240V
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	46
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	70
Max. Luminaires per 13A C Breaker	86
Max. Luminaires per 16A C Breaker	100
Max. Luminaires per 20A C Breaker	100
Max. Luminaires per 10A B Breaker	56
Max. Luminaires per 13A B Breaker	68
Max. Luminaires per 16A B Breaker	82
Max. Luminaires per 20A B Breaker	96

### Lifetime data

Lifespan L70 B50	90000
Lifespan L70 B20	80000
Lifespan L70 B10	78000
Lifespan L80 B50	56000
Lifespan L80 B20	50000
Lifespan L80 B10	49000
Lifespan L90 B50	27000
Lifespan L90 B20	24000

## Start Surface Wall Round

*START Surface Wall Round IP54 500lm Direct 2CCT*  
0047134

Lifespan L90 B10	24000
------------------	-------

### Physical data

Housing colour	RAL 9005 - Jet black
IP rating	IP54
IK rating	IK07
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Length (mm)	110
Nominal Product Width (mm)	76
Nominal Product Height (mm)	127
Weight (kg)	0.552


### Packaging

Single packaging type	Carton
Product EAN number	5410288471341
Packaging single length / height (cm)	13.5
Packaging single width (cm)	12.0
Packaging single depth (cm)	8.0
DUN14 (outer)	15410288471348
Units per outer package	8
Packaging outer length / height (cm)	34.0
Packaging outer width (cm)	25.5
Packaging outer depth (cm)	15.5

### Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

## PHOTOMETRY

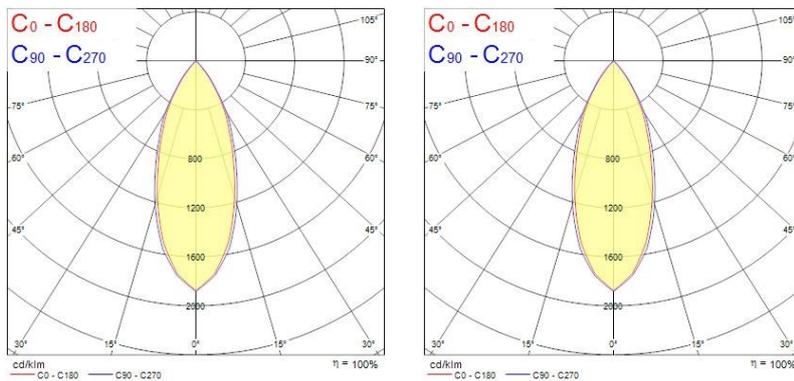

## TECHNICAL DRAWINGS

## Start Surface Wall Round

*START Surface Wall Round IP54 500lm Direct 2CCT*

0047134

