

RANA LED Recessed 1200 - SylSmart SSC
RANA LED R 1200 LO 4K LOUV+PRI SSC W GEN2
0052522



Product features

- Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1196x296x60mm, Sylvania White body colour, IP20, IK07, Electric Class 1, Light Engine Dimensions: 1130x65mm, SylSmart SSC Controlled, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 3100lm, 29W, 107lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.



PRODUCT OVERVIEW

Product name	RANA LED R 1200 LO 4K LOUV+PRI SSC W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	3100
Luminous flux (lm)	3100
Luminaire efficacy (lm/W)	107
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	29
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288525228

DATA TABLE

General data

RANA LED Recessed 1200 - SylSmart SSC

RANA LED R 1200 LO 4K LOUV+PRI SSC W GEN2

0052522

Product name	RANA LED R 1200 LO 4K LOUV+PRI SSC W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Office, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3100
Luminous flux (lm)	3100
Luminaire efficacy (lm/W)	107
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	29
Mains voltage (V)	220-240V
Lamp power factor	0.98
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
Drive current (mA)	275
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 16A C Breaker	36
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	17
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	27

RANA LED Recessed 1200 - SylSmart SSC

RANA LED R 1200 LO 4K LOUV+PRI SSC W GEN2

0052522

Lifetime data

Lifespan L70 B50	50000
Lifespan L70 B10	50000
Lifespan L80 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000
Lifespan L90 B10	50000


Physical data

Housing colour	White
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1196
Nominal Product Width (mm)	296
Nominal Product Height (mm)	60
Weight (kg)	5.6
Recessed Depth (mm)	120

Packaging

Single packaging type	Carton
Product EAN number	5410288525228
Packaging single length / height (cm)	124.5
Packaging single width (cm)	6.5
Packaging single depth (cm)	32.0
DUN14 (outer)	05410288525228
Units per outer package	1
Packaging outer length / height (cm)	124.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	32.0

PHOTOMETRY

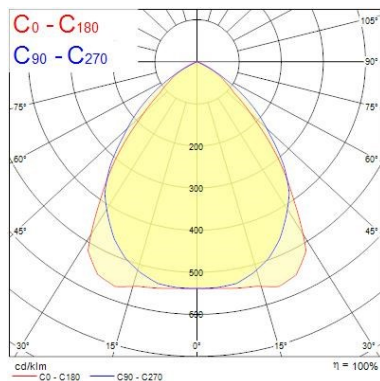

Distance [m]	Cone diameter [m]		Illuminance [lx]	
0.5	0.94 0.86	$E(0^\circ)$ $E(C90)$ $E(C0)$	43.3° 40.7° 40.7°	687 129 154
1.0	1.88 1.72	$E(0^\circ)$ $E(C90)$ $E(C0)$	43.3° 40.7° 40.7°	168 32 39
1.5	2.83 2.58	$E(0^\circ)$ $E(C90)$ $E(C0)$	43.3° 40.7° 40.7°	74 14 17
2.0	3.77 3.44	$E(0^\circ)$ $E(C90)$ $E(C0)$	43.3° 40.7° 40.7°	41 8 9
2.5	4.71 4.30	$E(0^\circ)$ $E(C90)$ $E(C0)$	43.3° 40.7° 40.7°	26 5 6
3.0	5.65 5.16	$E(0^\circ)$ $E(C90)$ $E(C0)$	43.3° 40.7° 40.7°	18 3 4

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 51.4°)
— C90 - C270 (Half beam angle: 56.6°)



RANA LED Recessed 1200 - SylSmart SSC
RANA LED R 1200 LO 4K LOUV+PRI SSC W GEN2
0052522

TECHNICAL DRAWINGS

