


RANA NEO Surface 600
RANA NEO 3300LM S 600 830 CC EM 2L WHITE
0054216



Product features

- Surface or Suspended LED luminaire with Micro Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 616x616x56mm, White body colour, IP20, IK07, Constant Current, Emergency 3 hours, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3300lm, 32W, 103lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<15, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

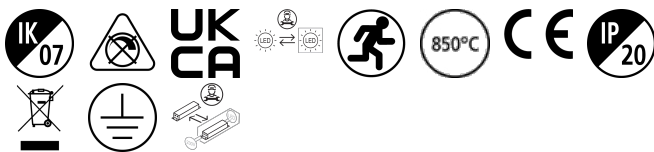

PRODUCT OVERVIEW

Product name	RANA NEO 3300LM S 600 830 CC EM 2L WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	3300
Luminous flux (lm)	3300
Luminaire efficacy (lm/W)	103
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 15
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Total power consumption (W)	32
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288542164

DATA TABLE

General data

RANA NEO Surface 600

RANA NEO 3300LM S 600 830 CC EM 2L WHITE

0054216

Product name	RANA NEO 3300LM S 600 830 CC EM 2L WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Education, Office
Operating temperature range (°C)	0°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3300
Luminous flux (lm)	3300
Luminaire efficacy (lm/W)	103
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 15
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

Electrical data

Total power consumption (W)	32
Mains voltage (V)	220-240V
Lamp power factor	0.97
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	15
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	300
Inrush Current (A)	5.5
Inrush Duration (µs)	20
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	41
Max. Luminaires per 13A C Breaker	53
Max. Luminaires per 16A C Breaker	65
Max. Luminaires per 20A C Breaker	82
Max. Luminaires per 10A B Breaker	41
Max. Luminaires per 13A B Breaker	53

RANA NEO Surface 600

RANA NEO 3300LM S 600 830 CC EM 2L WHITE
0054216

Max. Luminaires per 16A B Breaker	65
Max. Luminaires per 20A B Breaker	82

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	96000


Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	616
Nominal Product Width (mm)	616
Nominal Product Height (mm)	50
Weight (kg)	5.0

Packaging

Single packaging type	Carton
Product EAN number	5410288542164
Packaging single length / height (cm)	67.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	64.5
DUN14 (outer)	05410288542164
Units per outer package	1
Packaging outer length / height (cm)	67.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	64.5


PHOTOMETRY

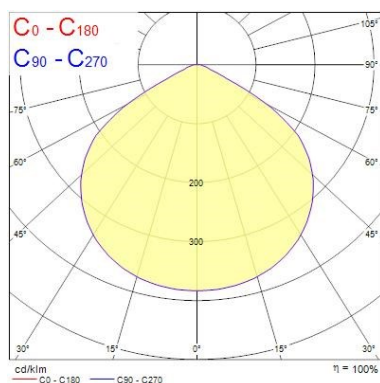

Distance [m]	Cone diameter [m]	Half beam angle [°]	Beam diameter [m]	Beam area [m²]	Illuminance [lx]
0.5	0.89	67.4°	0.87	0.60	900
1.0	1.78	67.4°	1.73	2.96	225
1.5	2.66	67.4°	2.00	6.28	150
2.0	3.55	67.4°	2.67	11.3	90
2.5	4.44	67.4°	3.33	17.7	50
3.0	5.33	67.4°	4.00	25.1	36
0.5	0.89	83.2°	0.87	0.60	900
1.0	1.78	83.2°	1.73	2.96	225
1.5	2.66	83.2°	2.00	6.28	150
2.0	3.55	83.2°	2.67	11.3	90
2.5	4.44	83.2°	3.33	17.7	50
3.0	5.33	83.2°	4.00	25.1	36

RANA NEO Surface 600

RANA NEO 3300LM S 600 830 CC EM 2L WHITE
0054216

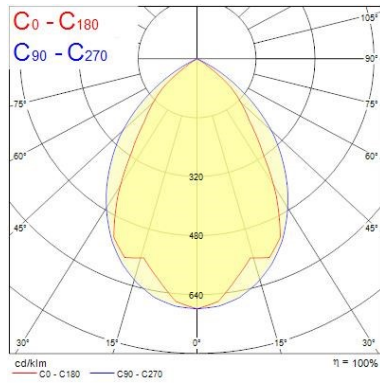

Distance [m]	Cone diameter [m]	E_{C0} [C0]	E_{C0} [C0]	Illuminance [lx]
0.5	1.51	E_{C0} [C0]	55.4°	1210
1.0	3.01	E_{C0} [C0]	55.4°	302
1.5	4.52	E_{C0} [C0]	55.4°	121
2.0	6.02	E_{C0} [C0]	55.4°	60
2.5	7.53	E_{C0} [C0]	55.4°	48
3.0	9.03	E_{C0} [C0]	55.4°	40

TECHNICAL DRAWINGS

