

Start Surface IP66 Ø350mm - Accessories
START SURFACE IP66 350MM EYELID WHT
0049032



- Product features
- Eyelid accessory for Start Surface IP66 350mm diameter - white colour



PRODUCT OVERVIEW

Product name	START SURFACE IP66 350MM EYELID WHT
Technology	Accessory
Housing	PC Polycarbonate
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002557
E-number FI	4579486
Warranty	5 years
Housing colour	RAL 9003 - Signal white
Product EAN number	5410288490328

DATA TABLE

General data	
Product name	START SURFACE IP66 350MM EYELID WHT
Technology	Accessory
Housing	PC Polycarbonate
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002557
E-number FI	4579486
Warranty	5 years
Electrical data	
Glow Wire Test (°C)	650
Physical data	
Housing colour	RAL 9003 - Signal white
Weight (kg)	0.17
Packaging	
Single packaging type	Carton
Product EAN number	5410288490328
Packaging single length / height (cm)	35.0


Start Surface IP66 Ø350mm - Accessories

START SURFACE IP66 350MM EYELID WHT

0049032

Packaging single width (cm)	35.0
Packaging single depth (cm)	0.8
DUN14 (outer)	15410288490325
Units per outer package	12
Packaging outer length / height (cm)	72.0
Packaging outer width (cm)	37.0
Packaging outer depth (cm)	49.5

PHOTOMETRY

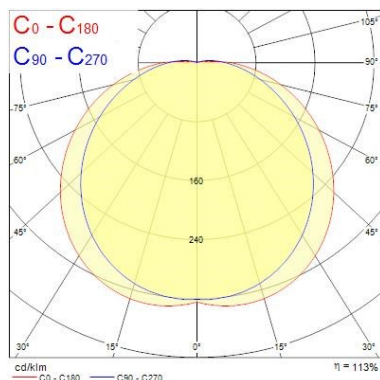


Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.48	1395
1.0	2.95	339
1.5	4.43	151
2.0	5.91	85
2.5	7.38	54
3.0	8.86	38

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 111.8°)

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.65	702
1.0	3.30	176
1.5	4.95	87
2.0	6.60	49
2.5	8.25	31
3.0	9.91	22

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 131.0°)
C90 - C270 (Half beam angle: 117.6°)

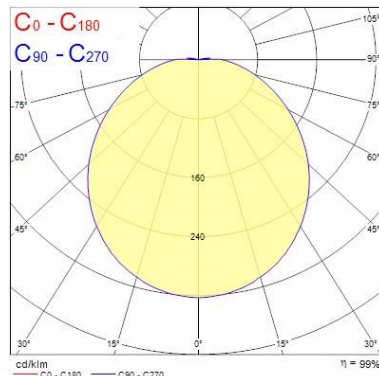

TECHNICAL DRAWINGS

