

INSAVER SLIM 165 SURFACE MOUNTED

Insaver Slim UGR19 165 1050lm 830 Surface

0030316



Product features

- Insaver Slim is a surface mounted LED downlight, Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 9W; 1050lm; 117lm/W; 3000K; UGR <19 with height of 95 mm. Meets TP(a) requirements.




PRODUCT OVERVIEW

Product name	Insaver Slim UGR19 165 1050lm 830 Surface
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4275973
Warranty	5 years
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	117
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	62
Beam Angle (°)	NA
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	9
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK07
Product EAN number	5410288303161

PHOTOMETRY

INSAVER SLIM 165 SURFACE MOUNTED
Insaver Slim UGR19 165 1050lm 830 Surface
0030316

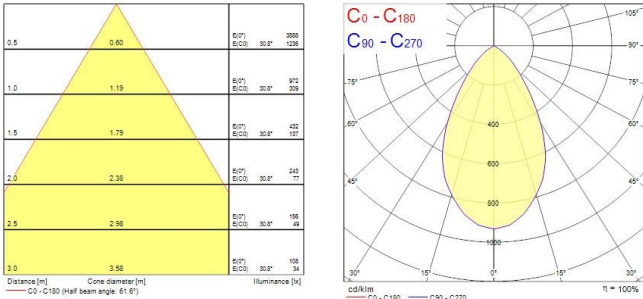

TECHNICAL DRAWINGS

