

INSAVER SLIM 205/225 MULTIPOWER


Insaver Slim U19 IP44 205 Multipower 620-1900lm830

0030452



Product features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 3000K; UGR <19 with shallow product depth 60mm. The range features a multipower functionality where the luminous flux of the luminaire can be tailored to local needs by only setting a quick selector switch on the driver. 8 steps available with adjustable lumen output of 620 - 1900lm at 3000K . Meets TP(a) requirements.

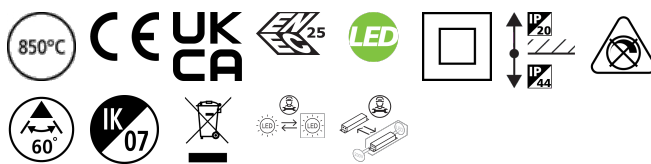

PRODUCT OVERVIEW











Product name	Insaver Slim U19 IP44 205 Multipower 620-1900lm830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278486
Warranty	5 years
Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	115
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	16.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288304526

PHOTOMETRY


INSAVER SLIM 205/225 MULTIPOWER

Insaver Slim U19 IP44 205 Multipower 620-1900lm830

0030452



INSAVER SLIM 205/225 MULTIPOWER
Insaver Slim U19 IP44 205 Multipower 620-1900lm830
0030452

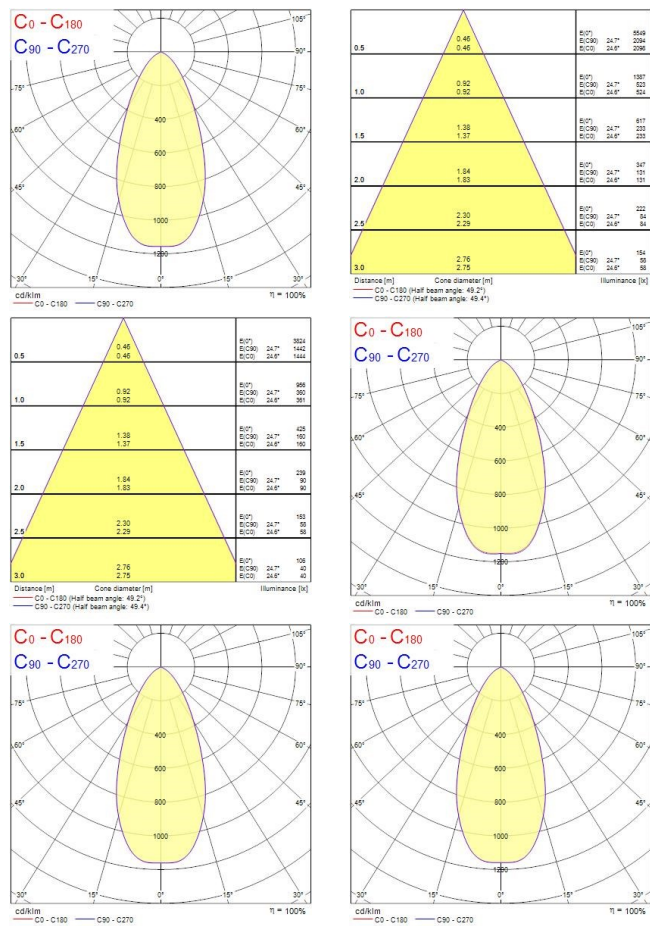

TECHNICAL DRAWINGS

