


RANA LED Recessed 600 - SylSmart SSC
RANA LED R 600 LO TW LOUV+PRI SSC01 W GEN2
0052690

- Product features
- RANA LED R 600 LO TW LOUV+PRI SSC01 W GEN2




PRODUCT OVERVIEW

Product name	RANA LED R 600 LO TW LOUV+PRI SSC01 W GEN2
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	2900
Luminous flux (lm)	2900
Luminaire efficacy (lm/W)	91
Colour temperature (K)	3000
Light colour	Tuneable White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	32
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288526904

PHOTOMETRY

RANA LED Recessed 600 - SylSmart SSC
RANA LED R 600 LO TW LOUV+PRI SSC01 W GEN2
0052690

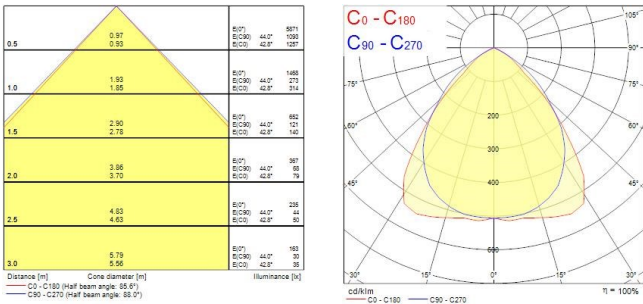

TECHNICAL DRAWINGS

