


START Waterproof Slim
START Waterproof Slim 1500 IP65 6500lm 840
0046032



Product features



- **START Waterproof Slim** is a LED integrated polycarbonate housing luminaire with easy to access electrical terminal through bayonet lock end caps and tool-free electrical connection due to push-in terminal. Flexible installation as mounting brackets can be positioned freely on the luminaire. 50W; 6500lm; High efficiency with 130lm/W and 50,000 lifetime. SDCM 6; IP65; IK08; Class I; 1489mm x 63mm x 75mm

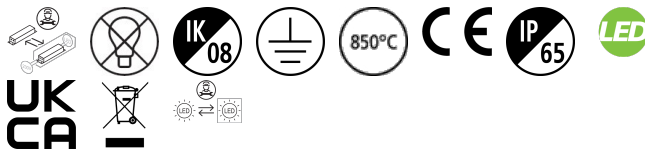

PRODUCT OVERVIEW

Product name	START Waterproof Slim 1500 IP65 6500lm 840
Technology	LED
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4309064
Warranty	5 years
Fixture luminous flux (lm)	6500
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
CRI (Ra)	80
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	50
Electrical protection	Class I
LED Flickering Rate	Medium (21% - 40%)
IP rating	IP65
IK rating	IK08
Product EAN number	5410288460321

PHOTOMETRY





START Waterproof Slim

START Waterproof Slim 1500 IP65 6500lm 840

0046032

TECHNICAL DRAWINGS

